

High-efficiency Circulator Pump

Calio

Type Series Booklet



Legal information/Copyright

Type Series Booklet Calio

All rights reserved. The contents provided herein must neither be distributed, copied, reproduced, edited or processed for any other purpose, nor otherwise transmitted, published or made available to a third party without the manufacturer's express written consent.

Subject to technical modification without prior notice.

© KSB SE & Co. KGaA, Frankenthal 19/04/2018

Contents

Building Services: Heating..... 4

Variable Speed Circulator Pumps 4

 Calio 4

 Main applications..... 4

 Fluids handled 4

 Operating data 4

 Design details 4

 Designation 5

 Materials..... 5

 Product benefits..... 5

 Certifications 5

 Selection Information 6

 Technical data 8

 Selection chart..... 9

 Characteristic curves..... 10

 Dimensions 25

 Installation information..... 26

 Scope of supply 26

 Accessories..... 27

Building Services: Heating

Variable Speed Circulator Pumps

Calio



Main applications

Heating, ventilation, air-conditioning, cooling and circulation systems

- One-pipe systems and two-pipe systems
- Underfloor heating systems
- Boiler circuits or primary circuits
- Storage tank circuits
- Solar power systems
- Heat pumps

Fluids handled

- Heating water to VDI 2035
- Higher-viscosity fluids (water/glycol mixture up to a mixing ratio of 1:1)

Operating data

Operating properties

Characteristic		Value
Flow rate	Q [m ³ /h]	≤ 51
	Q [l/s]	≤ 14,2
Head	H [m]	≤ 18
Fluid temperature	T [°C]	≥ -10
		≤ +110
Ambient temperature	T [°C]	≥ 0
		≤ +40 ¹⁾
Operating pressure	p [bar]	≤ 16
Pressure class	PN [bar]	6/10/16
Average sound pressure level	[dB (A)]	< 45 ²⁾
Screw-ended	Rp	1 - 1 1/4
Flanged	DN	32 - 100

Design details

Design

- Maintenance-free high-efficiency wet rotor pump (glandless)

Drive

- High-efficiency electric motor with continuously variable differential pressure control
- Electronically commutated synchronous motor with permanent magnet rotor
- Integrated motor protection
- 1~230 V AC +/- 10%
- Frequency 50 Hz/60 Hz
- Enclosure IPX4D
- Thermal class F
- Temperature class TF 110
- Energy efficiency index EEI ≤ 0.20³⁾
- Interference emissions EN 61000-6-3
- Interference immunity EN 61000-6-1

Bearings

- Product-lubricated special plain bearing

Connections

- Screw-ended or flanged

Operating modes

- Constant-pressure control
- Proportional-pressure control
- Temperature-governed differential pressure control (only with KSB Service Tool)
- Open-loop control via setpoint setting
- Eco Mode with dynamic differential pressure setpoint adjustment

1) Ambient temperature ≤ + 30 °C at a fluid temperature > 90 °C
 2) Calio 100-60: < 49 dB (A)
 3) Calio 25-100 and Calio 50-90: EEI = 0.21

Automatic functions

- Continuously variable speed adjustment depending on the mode of operation
- 0 - 10 V with external differential pressure/speed setpoint
- 0 - 10 V as input of the actual value of the temperature or actual value of the differential pressure
- Dual-pump operation
- Peak load operation
- Setback operation
- External start/stop
- Deblocking function
- Self-venting function
- Soft start
- Full motor protection with integrated trip electronics

Manual functions

- Setting the operating mode
- Setting the differential pressure setpoint
- Setting the speed level
- Locking the control panel

Signalling and display functions

- Periodically alternating display of flow rate, head and electrical input power
- Operating status shown on the display
- Error codes indicated on the display

Materials

Overview of available materials

Component ⁵⁾	Material
Volute casing	Grey cast iron with cathodic electrocoating (EN-GJL-200)
Shaft	Stainless steel 1.4034
Impeller	Plastic with glass fibre content (PSU-GF30)
Bearing	Ceramics/carbon
Can	Stainless steel 1.4301
Thermal insulation shells	Polypropylene

Product benefits

- Maximum savings of operating costs by high-efficiency technology combined with speed control
- Future-proof by maximum energy efficiency, exceeding future energy efficiency regulations such as ErP 2015.
- All-in concept saves investment costs and commissioning costs.
- Simple to set with press&turn dial combined with an integrated display and symbols indicating the operating mode
- High availability by dual-pump operation and integrated protective functions
- New Eco Mode enables additional savings of more than 40 % compared to proportional-pressure control. (⇒ Page 7)

- Configurable general fault messages and "in operation" messages (volt-free changeover contact)
- Serial digital Modbus RTU interface
- Service interface for KSB Service Tool

Designation

Example: Calio 40-180

Designation key

Code	Description
Calio	Type series
40	Connection
25	Rp 1
30	Rp 1 1/4
32	DN 32
40	DN 40
50	DN 50
65	DN 65
80	DN 80
100	DN 100
180	Head H [m]
180	Head ⁴⁾ × 10 Example: 18 m × 10 = 180

4) At flow rate Q = 0 m³/h

5) The components are free from paint-wetting impairment substances.

6) For 25-100 and 50-90: EEI = 0.21

Certifications

Overview

Label	Effective in:	Comment
	Europe	EEI ≤ 0.20 ⁶⁾
	Germany	All sizes

Selection Information

Minimum inlet pressure

The minimum inlet pressure p_{min} at the pump suction nozzle serves to avoid cavitation noises at an ambient temperature of +40 °C and the indicated fluid temperature T_{max} .

The indicated values are applicable up to 300 m above sea level. For installation at altitudes > 300 m, an allowance of 0.01 bar / 100 m must be added.

Minimum inlet pressure p_{min} specified for the fluid temperature

Fluid temperature [°C]	Minimum inlet pressure [bar]
≤ 80	0,5
81 to 95	1,5
96 to 110	2,5

Permissible fluid temperature

Temperature limits of the fluid handled

Permissible fluid temperature	Value
Maximum	110 °C
Minimum	-10 °C

Permissible ambient temperature

Permissible ambient temperatures specified for the fluid temperature

Fluid temperature	Permissible ambient temperature
≤ + 90 °C	+ 40 °C
> + 90 °C	+ 30 °C

Description of the Modbus interface


Technical data of the Modbus interface

Parameter	Description/value
Terminal cross-section	1,5 mm ²
Interface	RS485 (TIA-485-A) optically isolated
Bus connection	0.5 mm ² , shielded twisted pair bus cable
Cable length	<ul style="list-style-type: none"> ▪ 1000 m max. ▪ Stub line impermissible ▪ For cable lengths > 30 m take suitable measures to ensure overvoltage protection.
Wave impedance	120 Ω (cable type B to TIA-485-A)
Data rates [baud]	4800, 9600, 38,400, 57,600, 115,200 (19,200 = factory setting)
Protocol	Modbus RTU standard
Data format	<ul style="list-style-type: none"> ▪ 8 data bits ▪ Parity EVEN / ODD / NONE ▪ 1 stop bit
Modbus address	ID #1 to #247 selectable (ID #17 = factory setting)

 Further description see operating manual of the pump set.

Description of the Eco Mode

In Eco Mode, the pump characteristic curve (1) is quadratic. Starting at the discharge head setpoint H_s , the characteristic curve intersects the discharge head axis at $H_0 = 1/4 \times H_s$. By changing the differential pressure setpoint this pump characteristic curve can be adjusted to higher or lower differential pressures or discharge heads. Compared with the Proportional-pressure Control operating mode the Eco Mode can save more than 40 % in electrical input power. See below for an example of an Eco Mode characteristic curve.

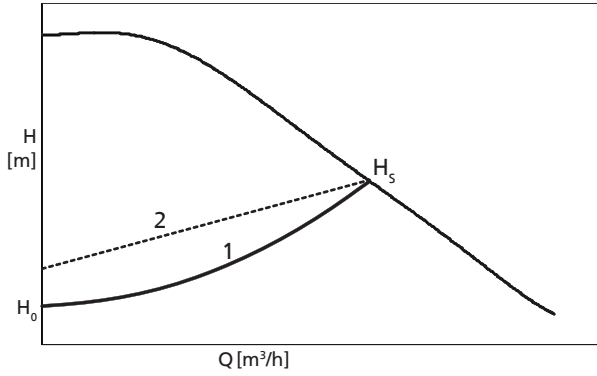

1	Eco Mode characteristic curve
2	Proportional-pressure Control characteristic curve for comparison

Description of the characteristic curve

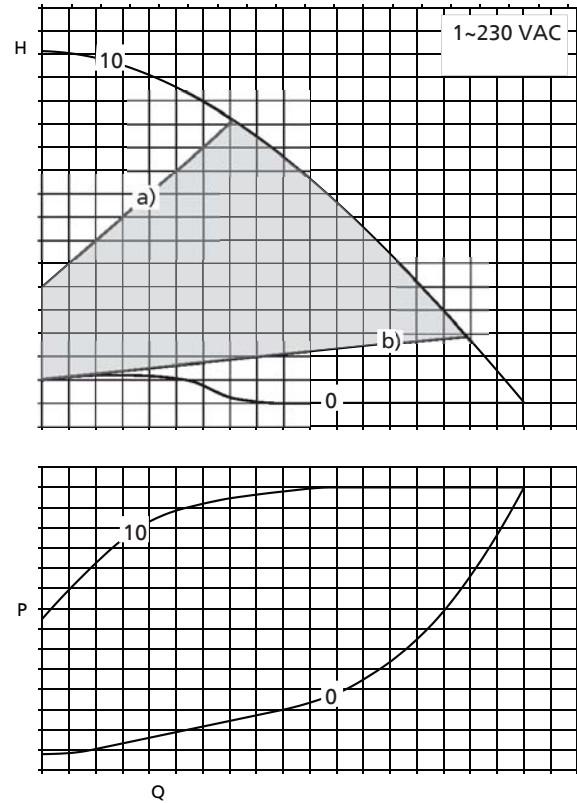


Fig. 1: Selection example

i The pump characteristic curve can be adjusted between a) and b) in increments of 1 % by turning the control element.

0	Level 0 = open-loop control, minimum speed (corresponds to a setting of 0 %)
10	Level 10 = open-loop control, maximum speed (corresponds to a setting of 100 %)
	Control range
a)	Control curve, maximum head
b)	Control curve, minimum head

Technical data


Calio selection table

Size	Connection		PN [bar]	Speed		P ₁ [W]	I _N 1~230 V AC, 50 Hz/60 Hz [A]	Mat. No.	[kg]
	Piping	Pump		Min.	Max.				
				[rpm]	[rpm]				
25-40	Rp 1	G 1 1/2	10	1000	2900	3,5 - 75	0,15 - 0,60	29134911	5,3
25-40	Rp 1	G 1 1/2	16	1000	2900	3,5 - 75	0,15 - 0,60	29134931	5,3
25-60	Rp 1	G 1 1/2	10	1000	3500	3,5 - 150	0,15 - 0,70	29134912	5,3
25-60	Rp 1	G 1 1/2	16	1000	3500	3,5 - 150	0,15 - 0,70	29134932	5,3
25-80	Rp 1	G 1 1/2	10	1000	4000	3,5 - 190	0,15 - 0,85	29134913	5,3
25-80	Rp 1	G 1 1/2	16	1000	4000	3,5 - 190	0,15 - 0,85	29134933	5,3
25-100	Rp 1	G 1 1/2	10	1000	4500	3,5 - 220	0,15 - 1,00	29134914	5,3
25-100	Rp 1	G 1 1/2	16	1000	4500	3,5 - 220	0,15 - 1,00	29134934	5,3
30-40	Rp 1 1/4	G 2	10	1000	2900	3,5 - 75	0,15 - 0,60	29134915	5,5
30-40	Rp 1 1/4	G 2	16	1000	2900	3,5 - 75	0,15 - 0,60	29134935	5,5
30-60	Rp 1 1/4	G 2	10	1000	3500	3,5 - 150	0,15 - 0,70	29134916	5,5
30-60	Rp 1 1/4	G 2	16	1000	3500	3,5 - 150	0,15 - 0,70	29134936	5,5
30-80	Rp 1 1/4	G 2	10	1000	4000	3,5 - 190	0,15 - 0,85	29134917	5,5
30-80	Rp 1 1/4	G 2	16	1000	4000	3,5 - 190	0,15 - 0,85	29134937	5,5
30-100	Rp 1 1/4	G 2	10	1000	4500	3,5 - 220	0,15 - 1,00	29134918	5,5
30-100	Rp 1 1/4	G 2	16	1000	4500	3,5 - 220	0,15 - 1,00	29134938	5,5
30-120	Rp 1 1/4	G 2	10	1000	4000	3,5 - 370	0,15 - 1,60	29134919	6,46
30-120	Rp 1 1/4	G 2	16	1000	4000	3,5 - 370	0,15 - 1,60	29134939	6,46
32-120	DN 32	DN 32	6/10	1000	4000	3,5 - 370	0,15 - 1,60	29134920	9,62
32-120	DN 32	DN 32	16	1000	4000	3,5 - 370	0,15 - 1,60	29134940	9,62
40-60	DN 40	DN 40	6/10	1000	3700	3,5 - 120	0,15 - 0,60	29134921	8,68
40-60	DN 40	DN 40	16	1000	3700	3,5 - 120	0,15 - 0,60	29134941	8,68
40-70	DN 40	DN 40	6/10	1000	3900	3,5 - 150	0,15 - 0,70	29134922	8,68
40-70	DN 40	DN 40	16	1000	3900	3,5 - 150	0,15 - 0,70	29134942	8,68
40-80	DN 40	DN 40	6/10	1000	3600	3,5 - 300	0,15 - 1,30	29134923	11,49
40-80	DN 40	DN 40	16	1000	3600	3,5 - 300	0,15 - 1,30	29134943	11,49
40-90	DN 40	DN 40	6/10	1000	4500	3,5 - 190	0,15 - 0,85	29134924	8,68
40-90	DN 40	DN 40	16	1000	4500	3,5 - 190	0,15 - 0,85	29134944	8,68
40-100	DN 40	DN 40	6/10	1000	4000	3,5 - 400	0,15 - 1,75	29134925	11,49
40-100	DN 40	DN 40	16	1000	4000	3,5 - 400	0,15 - 1,75	29134945	11,49
40-120	DN 40	DN 40	6/10	1000	2900	5 - 850	0,32 - 3,90	29134862	20,5
40-120	DN 40	DN 40	16	1000	2900	5 - 850	0,32 - 3,90	29134879	20,5
40-180	DN 40	DN 40	6/10	1000	3500	5 - 860	0,32 - 3,95	29134863	20,5
40-180	DN 40	DN 40	16	1000	3500	5 - 860	0,32 - 3,95	29134880	20,5
50-40	DN 50	DN 50	6/10	1000	3200	3,5 - 150	0,15 - 0,70	29134926	9,9
50-40	DN 50	DN 50	16	1000	3200	3,5 - 150	0,15 - 0,70	29134946	9,9
50-60	DN 50	DN 50	6/10	1000	3300	3,5 - 300	0,15 - 1,30	29134927	12,87
50-60	DN 50	DN 50	16	1000	3300	3,5 - 300	0,15 - 1,30	29134947	12,87
50-80	DN 50	DN 50	6/10	1000	3500	3,5 - 370	0,15 - 1,60	29134928	12,87
50-80	DN 50	DN 50	16	1000	3500	3,5 - 370	0,15 - 1,60	29134948	12,87
50-90	DN 50	DN 50	6/10	1000	4500	3,5 - 200	0,15 - 0,90	29134929	9,9
50-90	DN 50	DN 50	16	1000	4500	3,5 - 200	0,15 - 0,90	29134949	9,9
50-100	DN 50	DN 50	6/10	1000	2750	5 - 790	0,32 - 3,60	29134864	21,6
50-100	DN 50	DN 50	16	1000	2750	5 - 790	0,32 - 3,60	29134881	21,6
50-120	DN 50	DN 50	6/10	1000	2930	5 - 810	0,32 - 3,70	29134865	21,6
50-120	DN 50	DN 50	16	1000	2930	5 - 810	0,32 - 3,80	29134882	21,6
50-150	DN 50	DN 50	6/10	1000	3260	5 - 930	0,32 - 3,80	29134866	21,6
50-150	DN 50	DN 50	16	1000	3260	5 - 930	0,32 - 3,80	29134883	21,6
50-180	DN 50	DN 50	6/10	1000	3600	5 - 1100	0,32 - 4,00	29134867	21,6
50-180	DN 50	DN 50	16	1000	3600	5 - 1100	0,32 - 4,00	29134884	21,6
65-60	DN 65	DN 65	6/10	1000	3100	3,5 - 380	0,15 - 1,70	29134930	17,56
65-60	DN 65	DN 65	16	1000	3100	3,5 - 380	0,15 - 1,70	29134950	17,56
65-120	DN 65	DN 65	6/10	1000	3200	5 - 770	0,32 - 3,50	29134868	29,7
65-120	DN 65	DN 65	16	1000	3200	5 - 770	0,32 - 3,50	29134885	29,7

Size	Connection		PN [bar]	Speed		P ₁ [W]	I _N 1~230 V AC, 50 Hz/60 Hz [A]	Mat. No.	[kg]
	Piping	Pump		Min.	Max.				
				[rpm]	[rpm]				
80-80	DN 80	DN 80	6	1000	2400	5 - 700	0,32 - 3,20	29134869	31,4
80-80	DN 80	DN 80	10	1000	2400	5 - 700	0,32 - 3,20	29134870	31,4
80-80	DN 80	DN 80	16	1000	2400	5 - 700	0,32 - 3,20	29134886	31,4
100-60	DN 100	DN 100	6	1000	2100	5 - 750	0,32 - 3,50	29134871	39,4
100-60	DN 100	DN 100	10	1000	2100	5 - 750	0,32 - 3,50	29134872	39,4
100-60	DN 100	DN 100	16	1000	2100	5 - 750	0,32 - 3,50	29134887	39,4


Selection chart

Calio

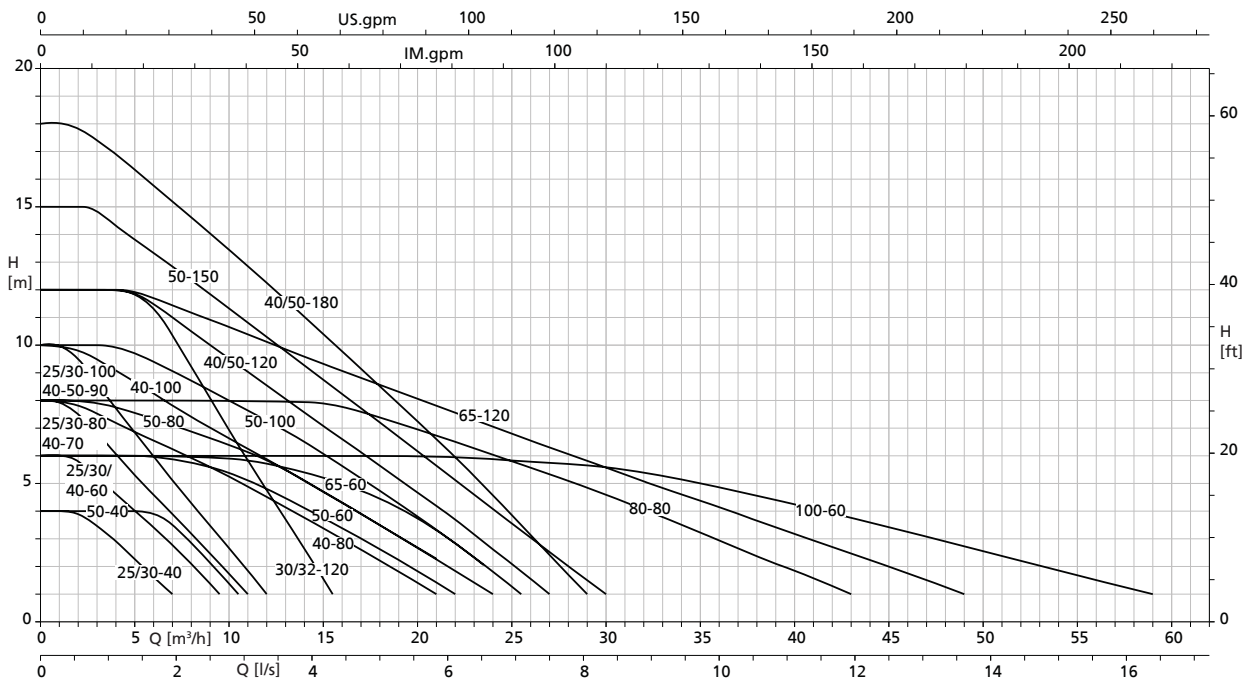


Characteristic curves


Calio 25-40 Boost Mode, Eco Mode

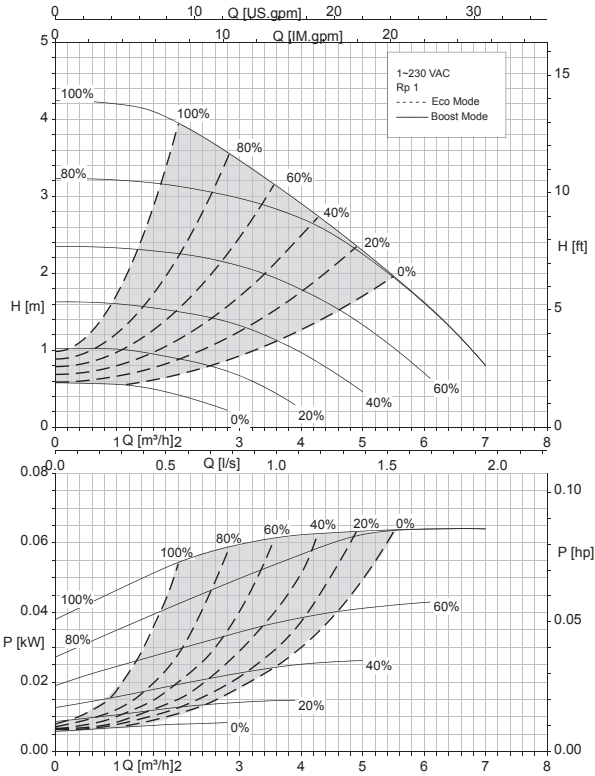


Calio 25-40 Δp_v , Δp_c

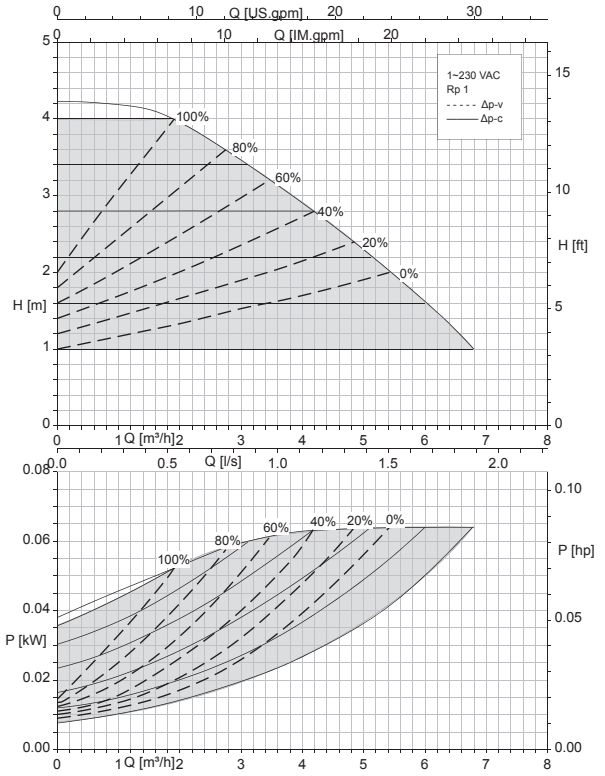


Calio 25-60 Boost Mode, Eco Mode

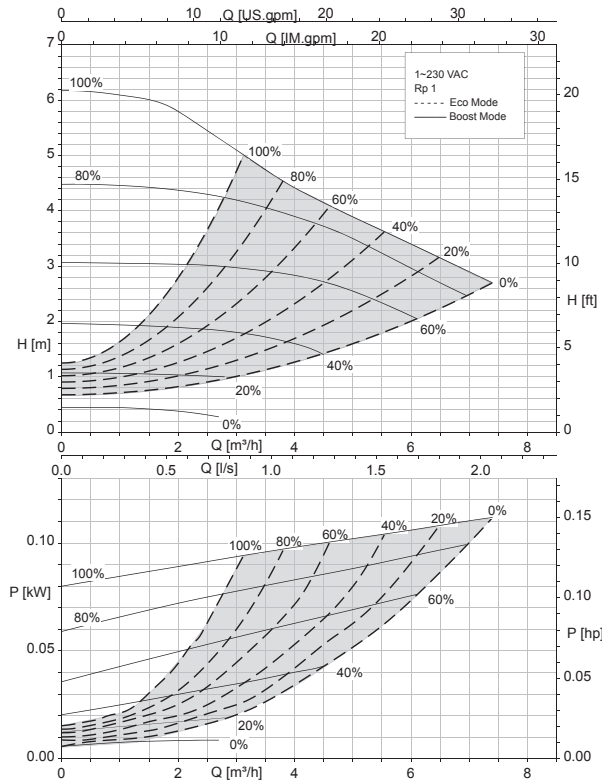


Calio 25-60 Δp_v , Δp_c

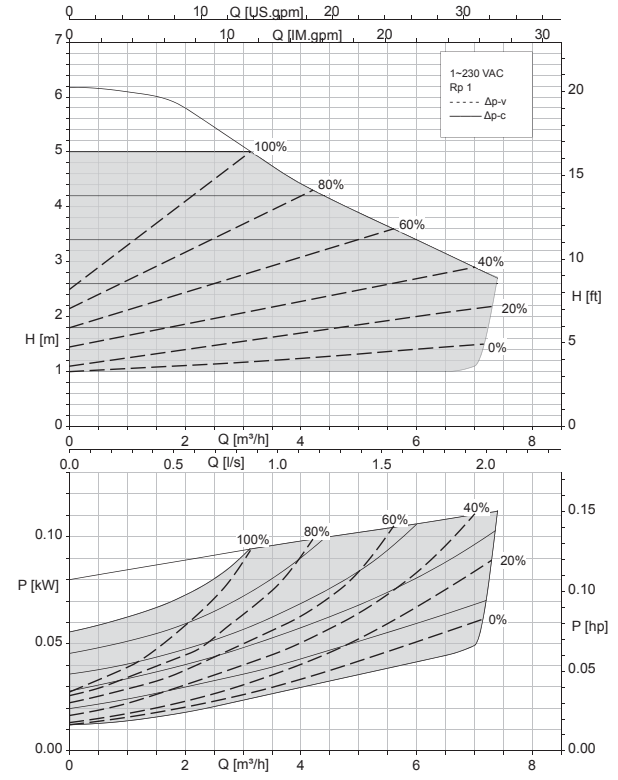


Calio 25-80 Boost Mode, Eco Mode

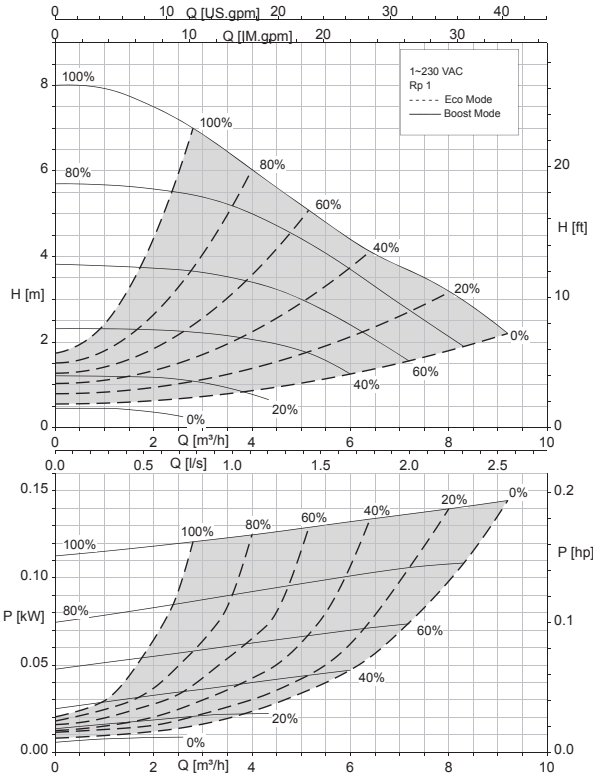


Calio 25-80 Δp_v , Δp_c

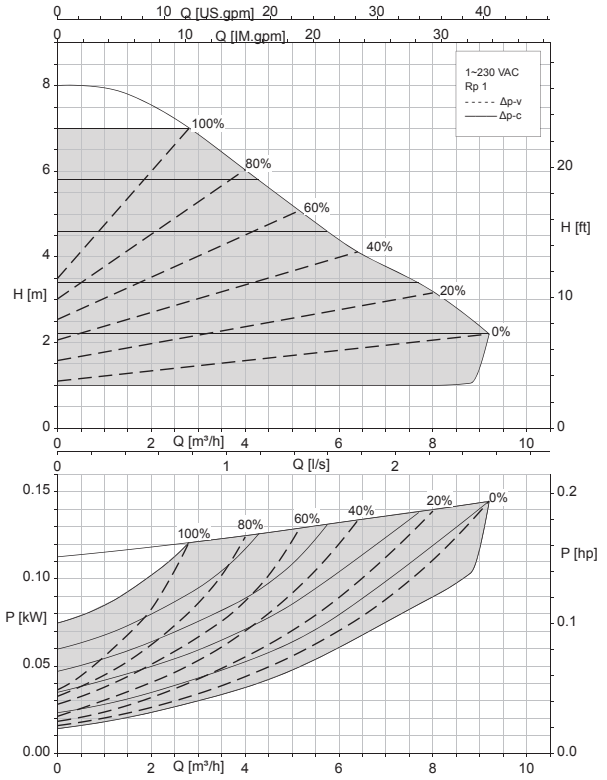


Calio 25-100 Boost Mode, Eco Mode

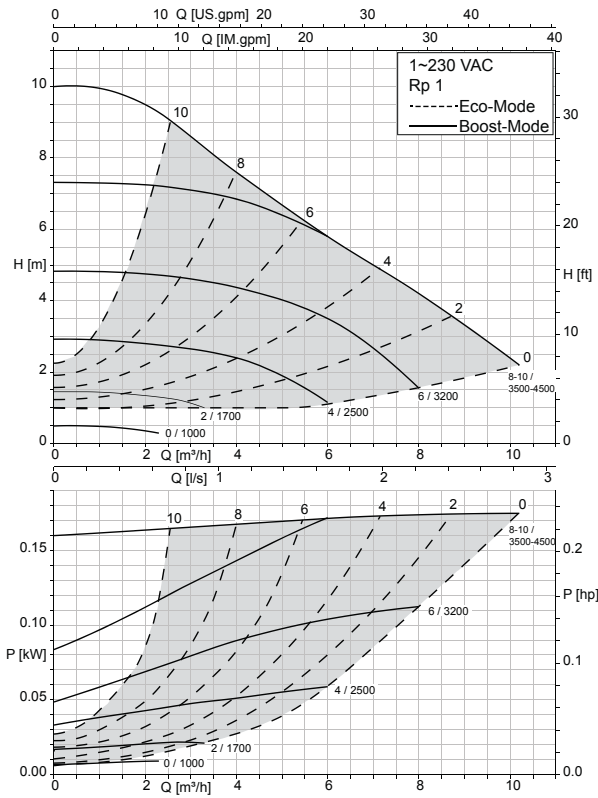


Calio 25-100 Δp_v , Δp_c

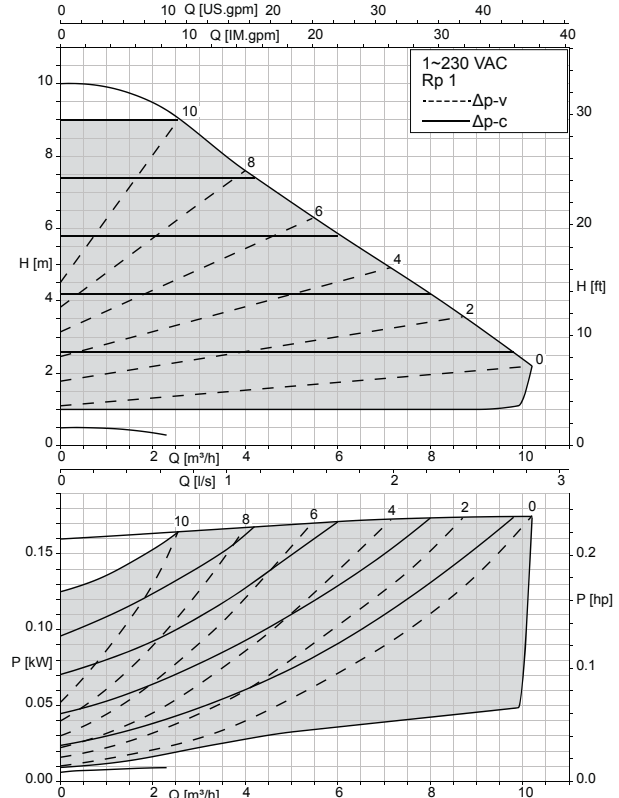


Calio 30-40 Boost Mode, Eco Mode

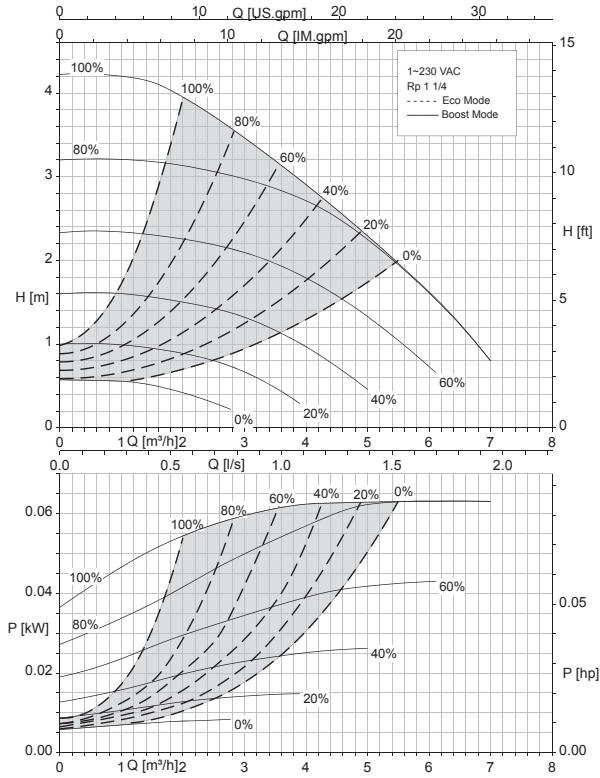


Calio 30-40 Δp_v , Δp_c

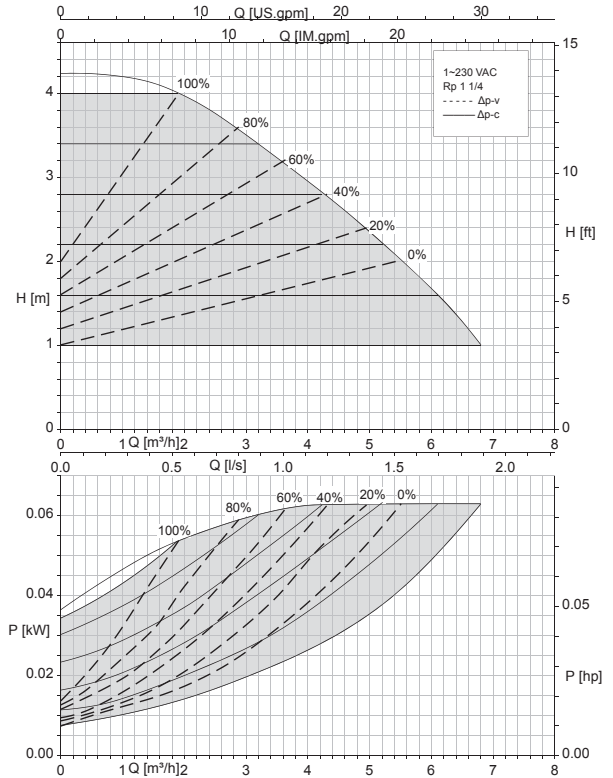


Calio 30-60 Boost Mode, Eco Mode

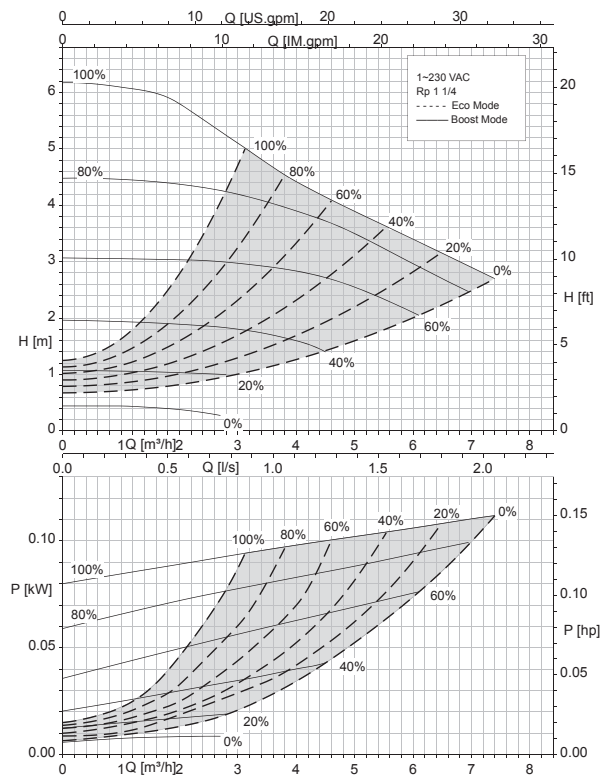


Calio 30-60 Δp_v , Δp_c

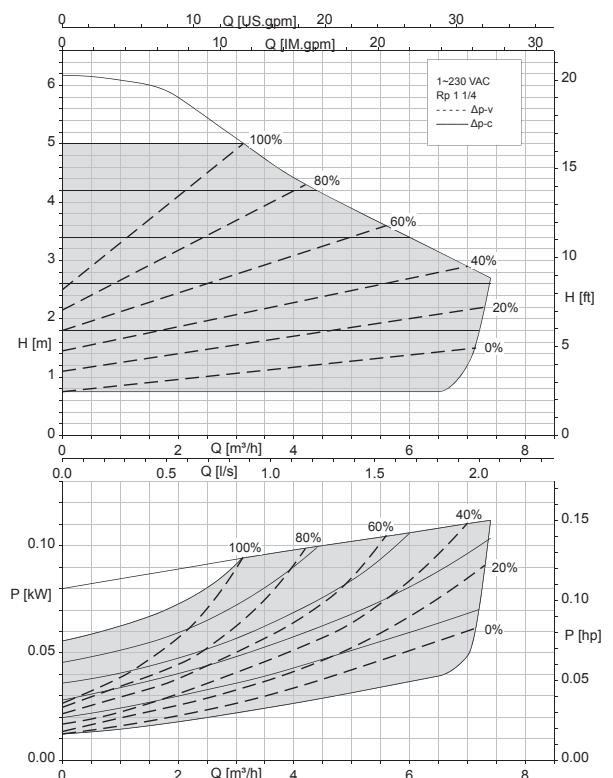


Calio 30-80 Boost Mode, Eco Mode

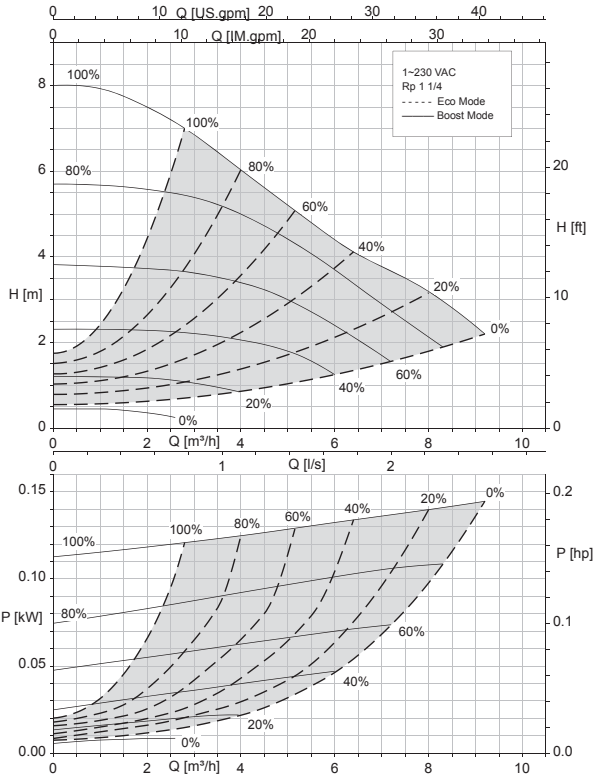


Calio 30-80 Δp_v , Δp_c

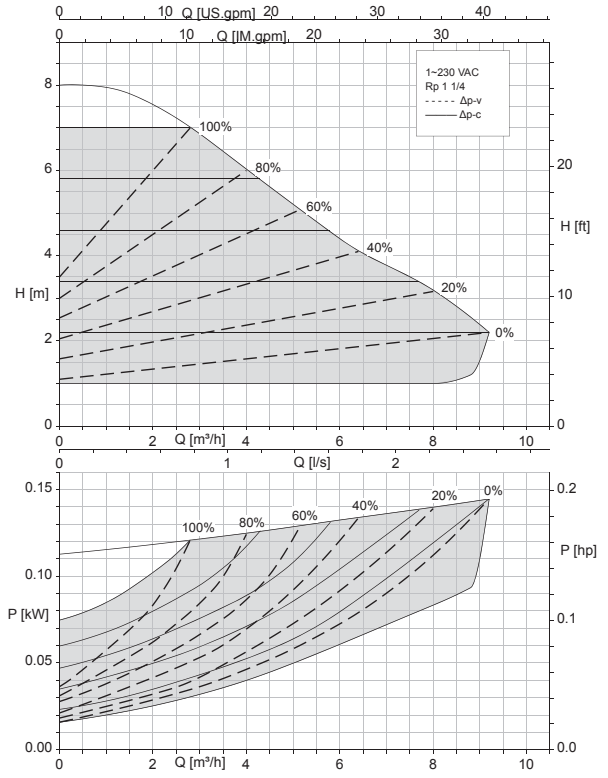


Calio 30-100 Boost Mode, Eco Mode

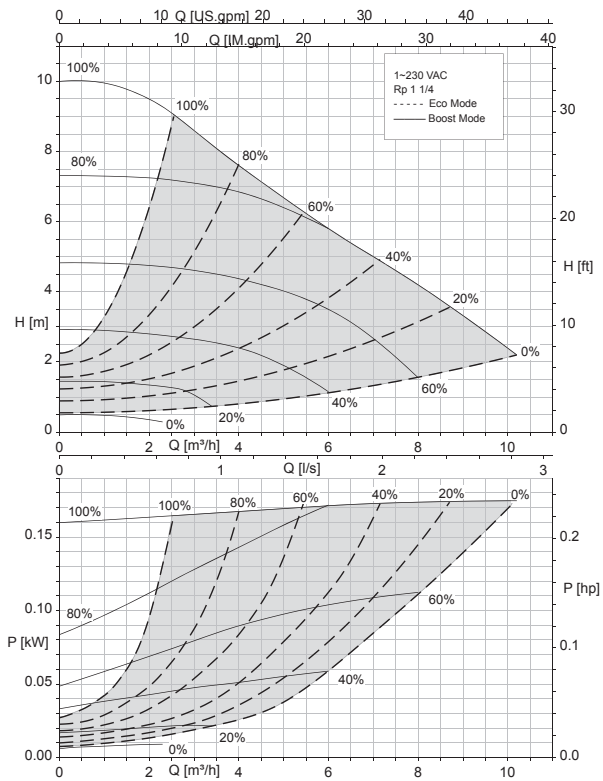


Calio 30-100 Δp_v , Δp_c

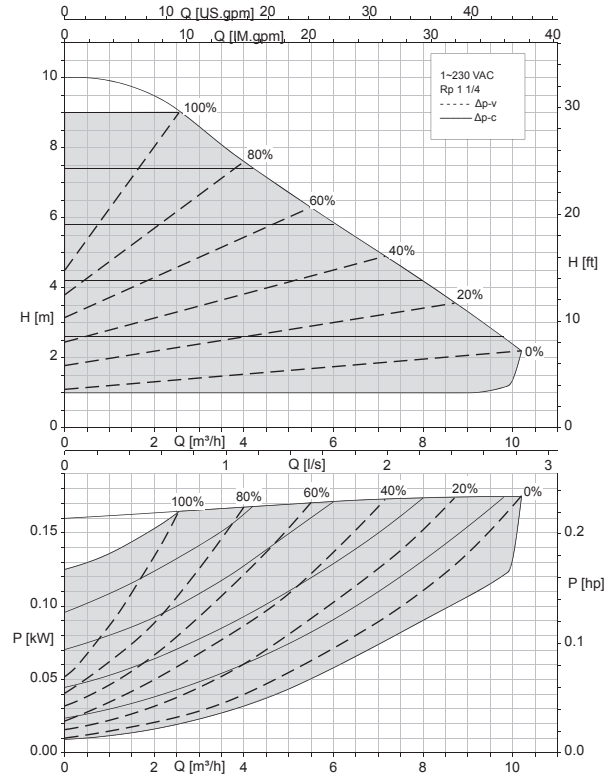


Calio 30-120 Boost Mode, Eco Mode

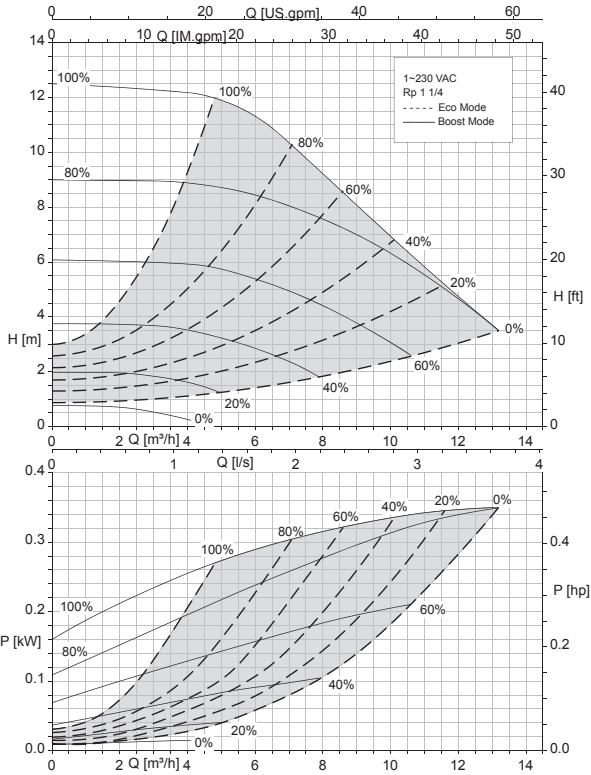


Calio 30-120 Δp_v , Δp_c

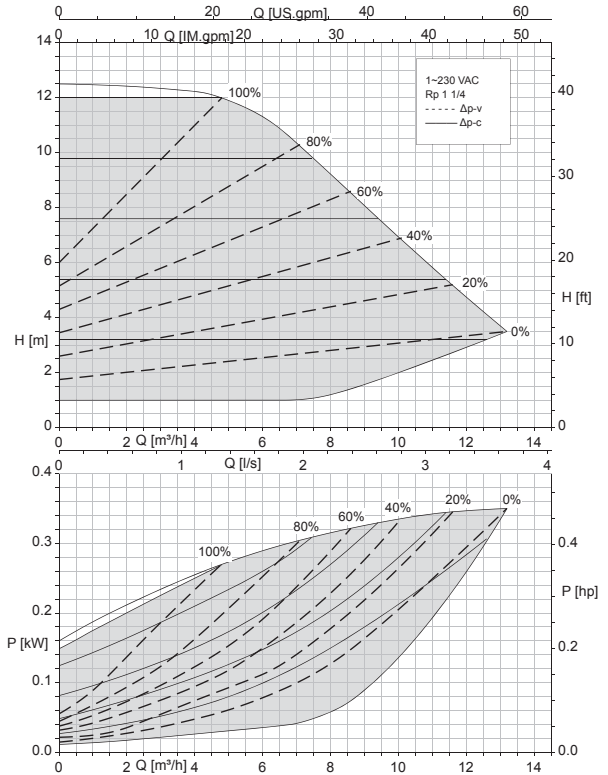


Calio 32-120 Boost Mode, Eco Mode

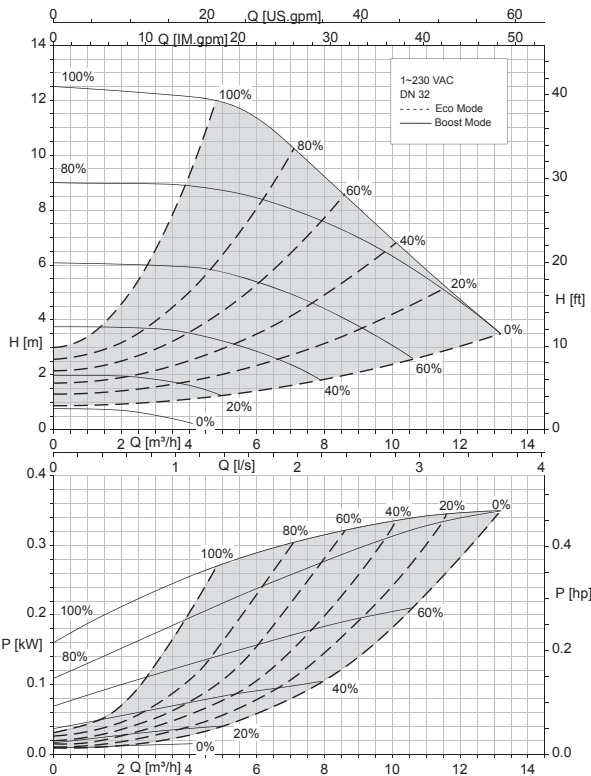


Calio 32-120 Δp_v , Δp_c

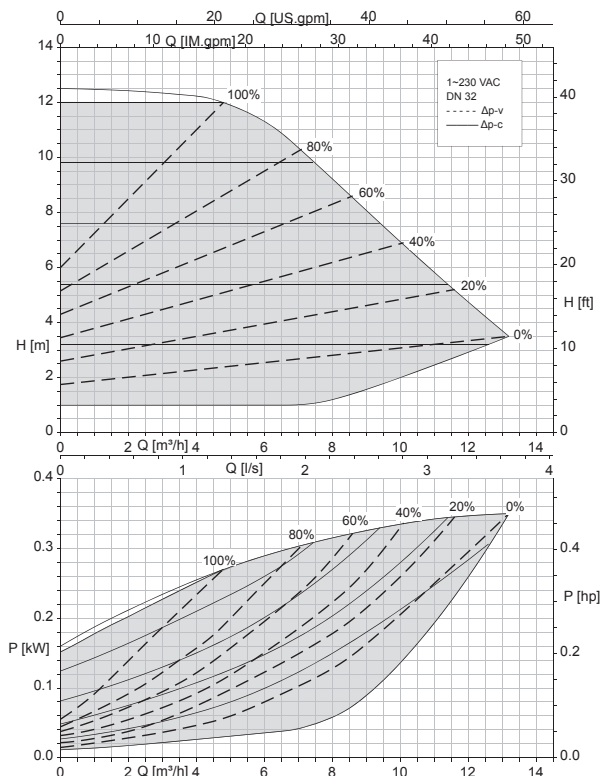


Calio 40-60 Boost Mode, Eco Mode

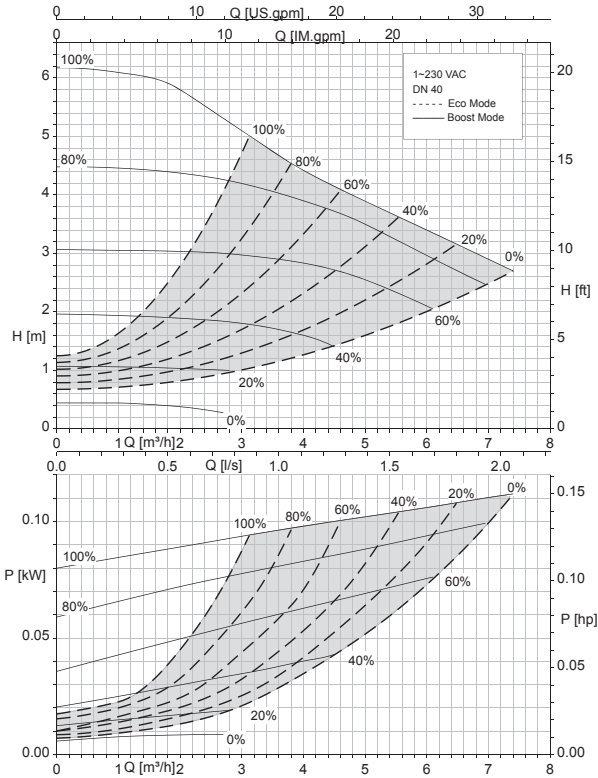


Calio 40-60 Δp_v , Δp_c

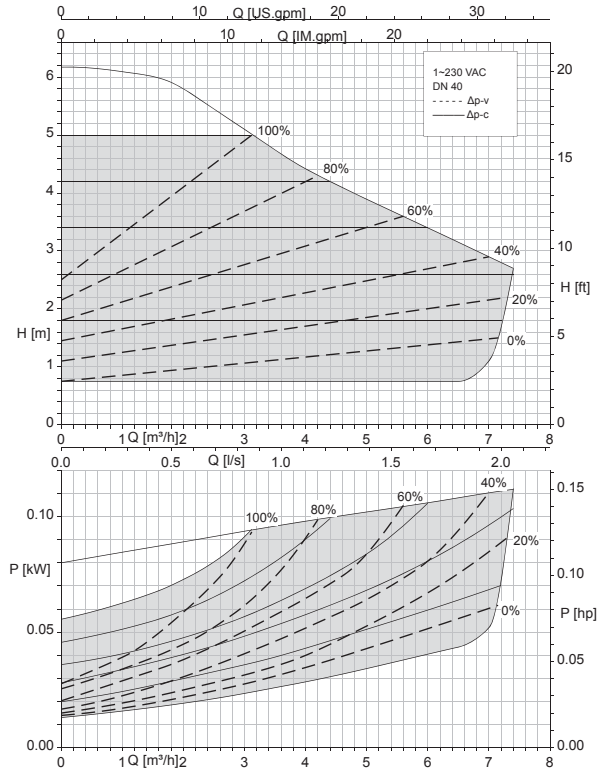


Calio 40-70 Boost Mode, Eco Mode

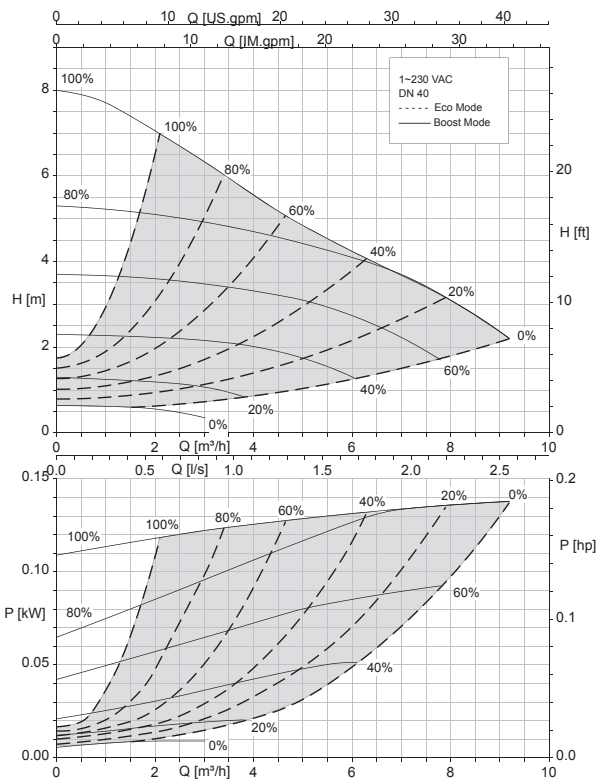


Calio 40-70 Δp_v , Δp_c

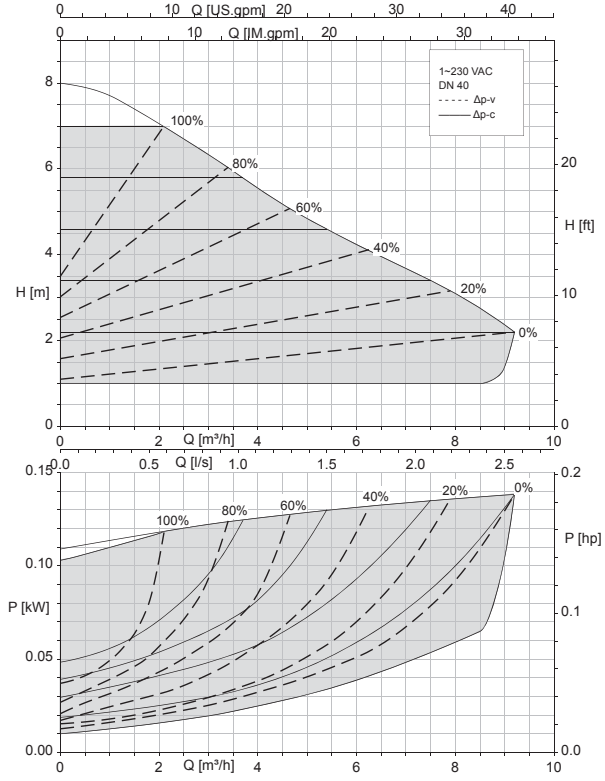


Calio 40-80 Boost Mode, Eco Mode

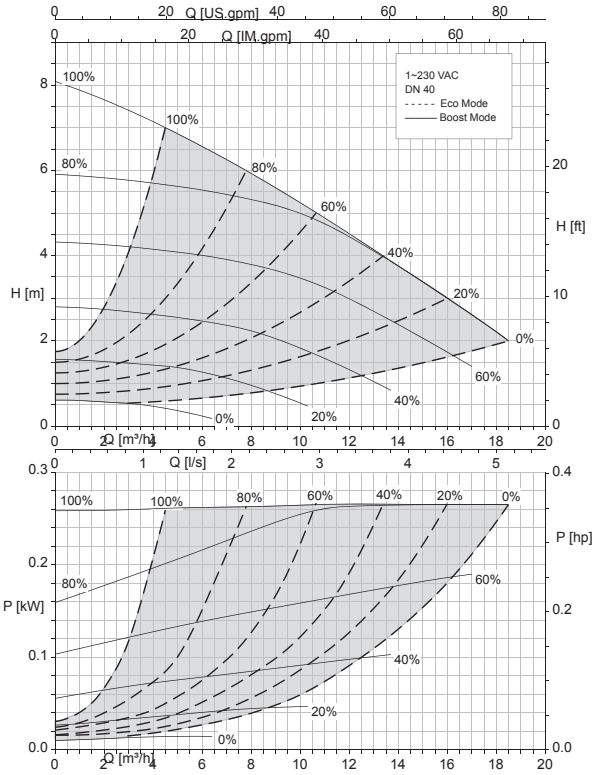


Calio 40-80 Δp_v , Δp_c

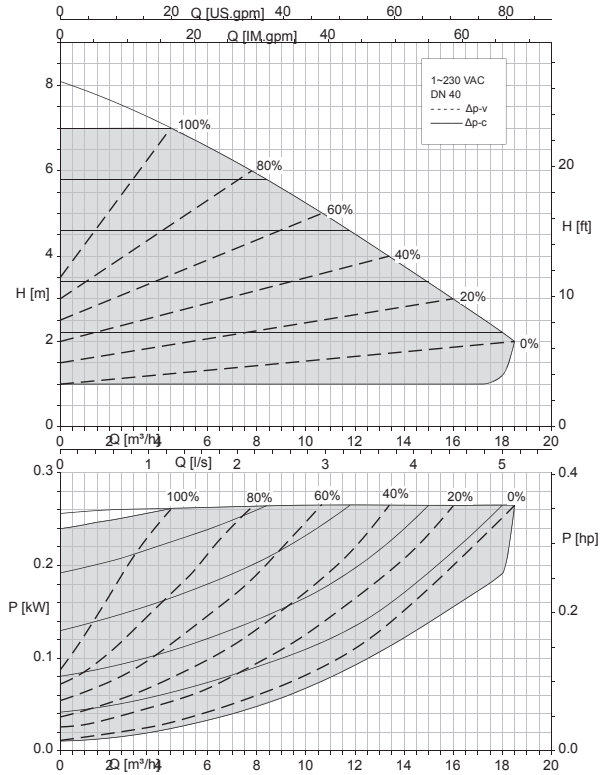


Calio 40-90 Boost Mode, Eco Mode

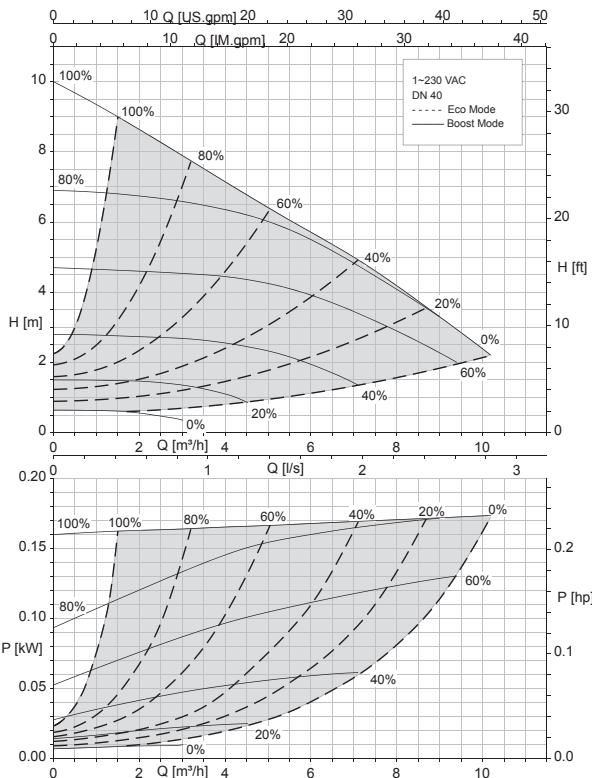


Calio 40-90 Δp_v , Δp_c

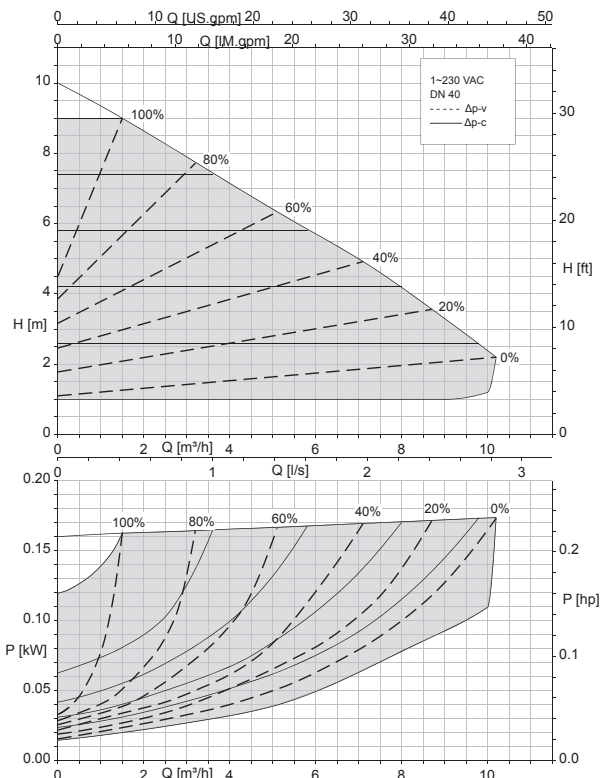


Calio 40-100 Boost Mode, Eco Mode

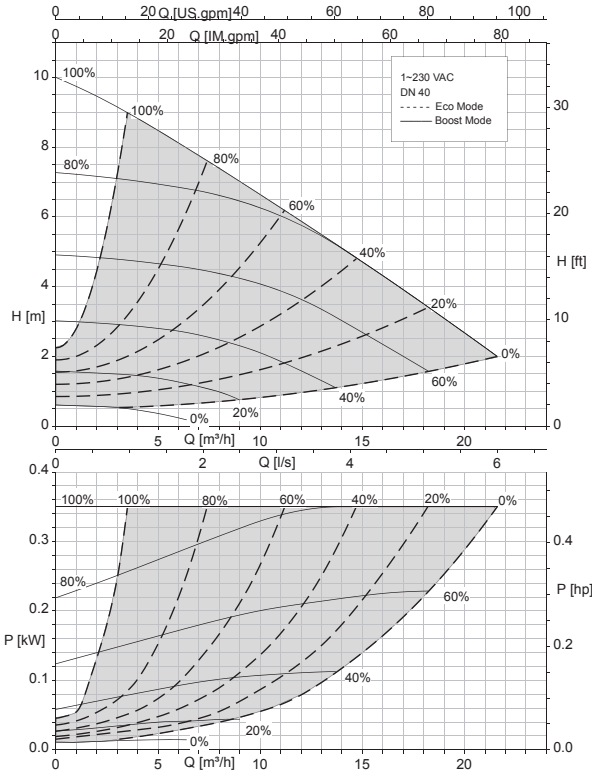


Calio 40-100 Δp_v , Δp_c

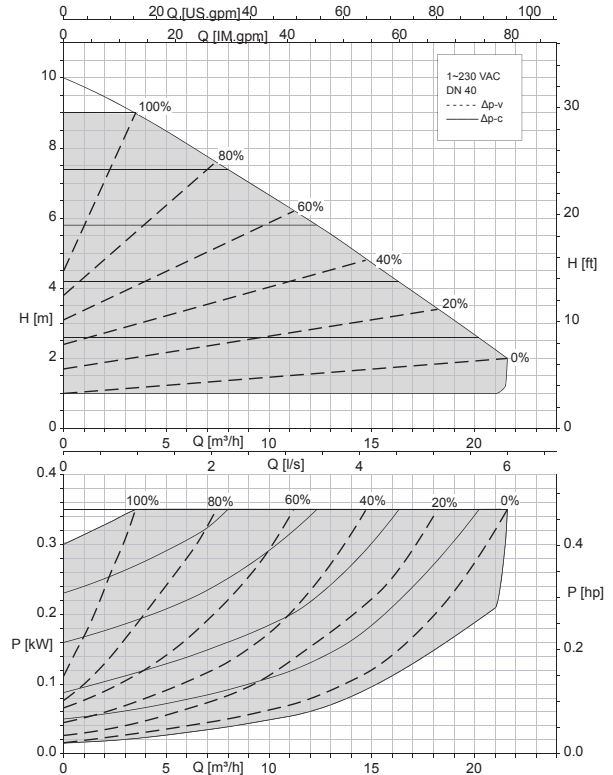


Calio 40-120 Boost Mode, Eco Mode

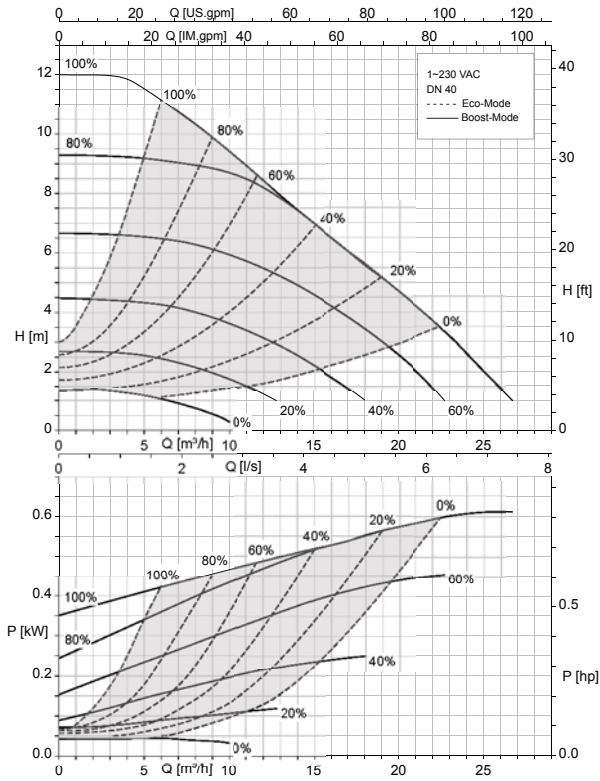


Calio 40-120 Δp_v , Δp_c

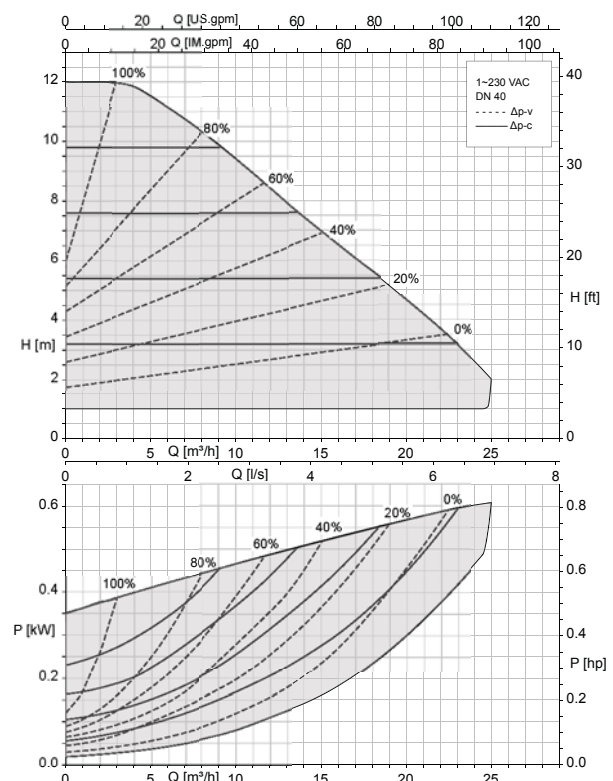


Calio 40-180 Boost Mode, Eco Mode

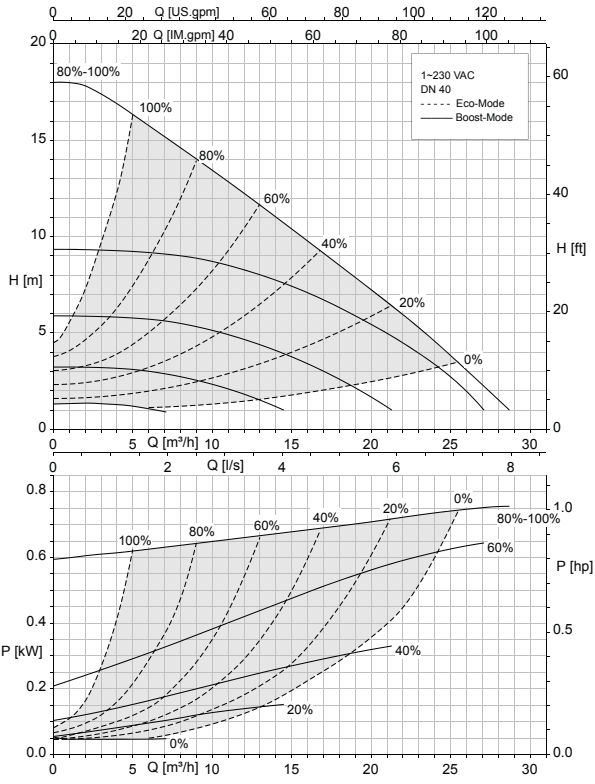


Calio 40-180 Δp_v , Δp_c

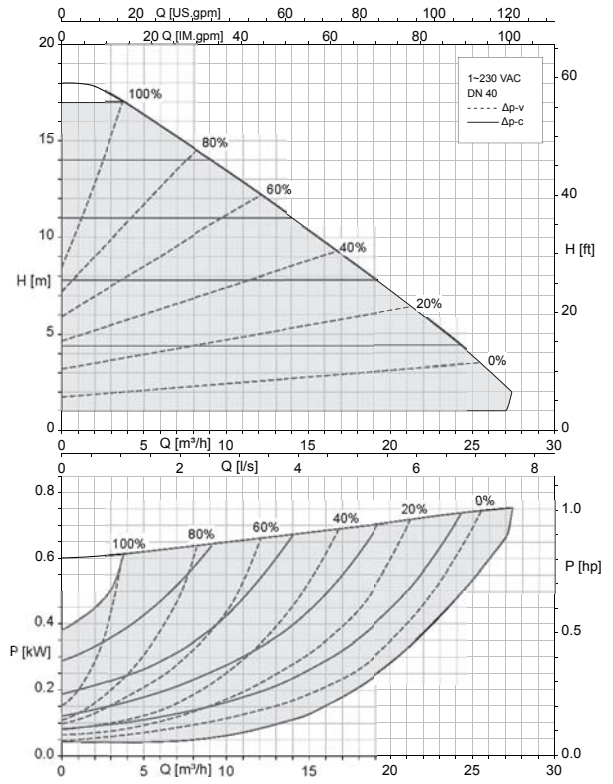


Calio 50-40 Boost Mode, Eco Mode

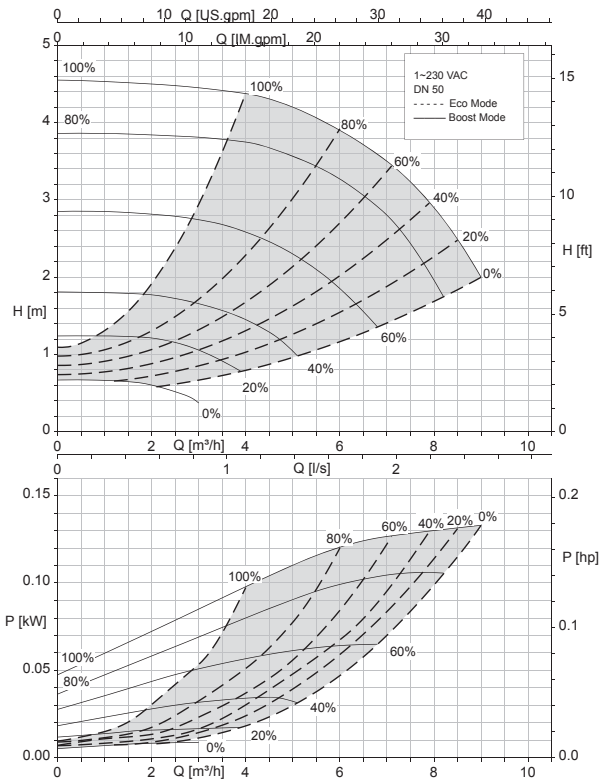


Calio 50-40 Δp_v , Δp_c

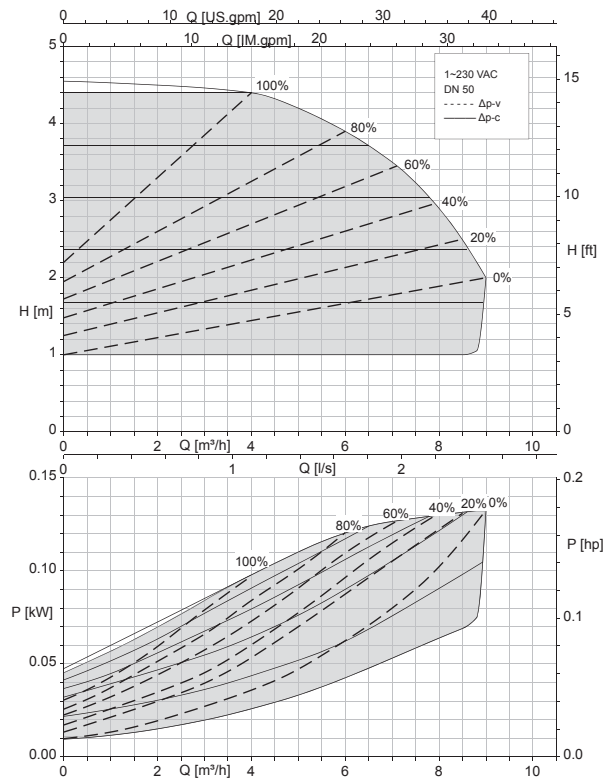


Calio 50-60 Boost Mode, Eco Mode

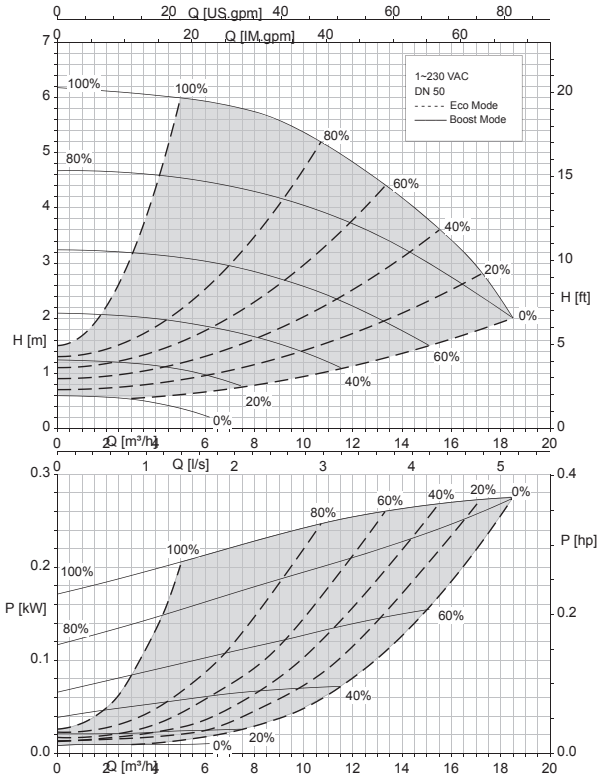


Calio 50-60 Δp_v , Δp_c

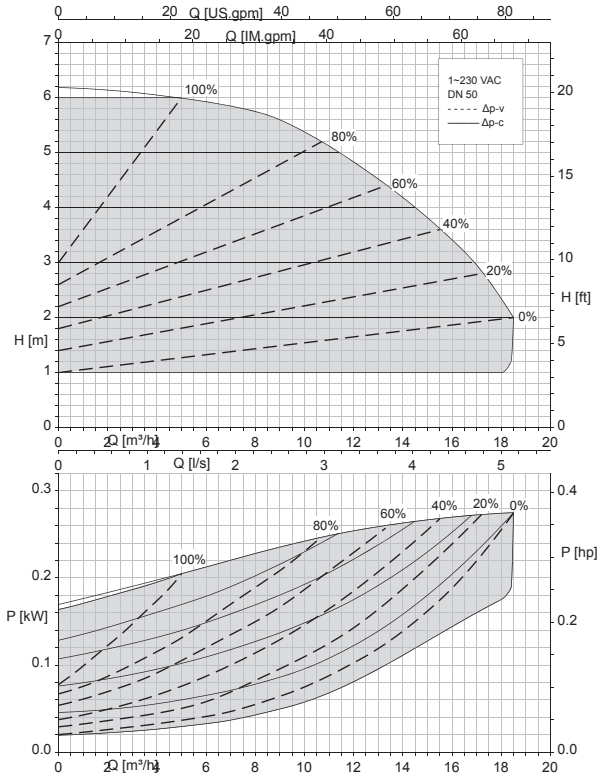


Calio 50-80 Boost Mode, Eco Mode

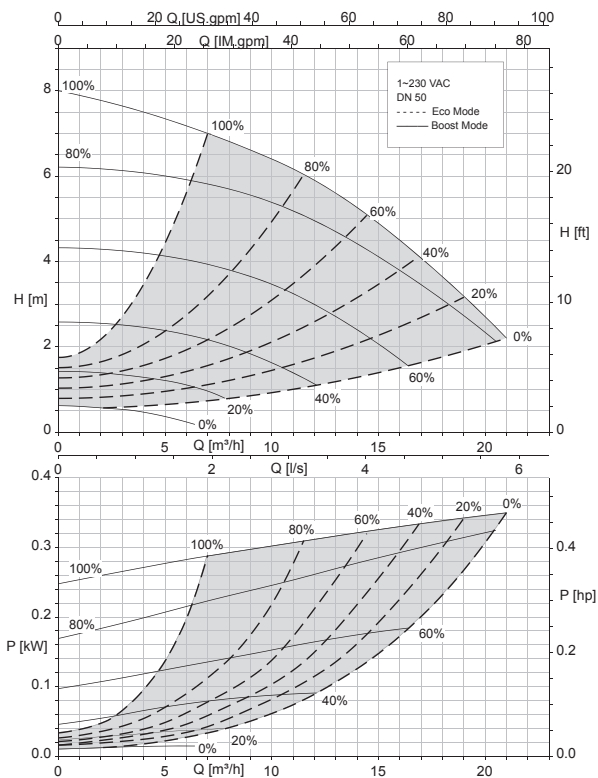


Calio 50-80 Δp_v , Δp_c

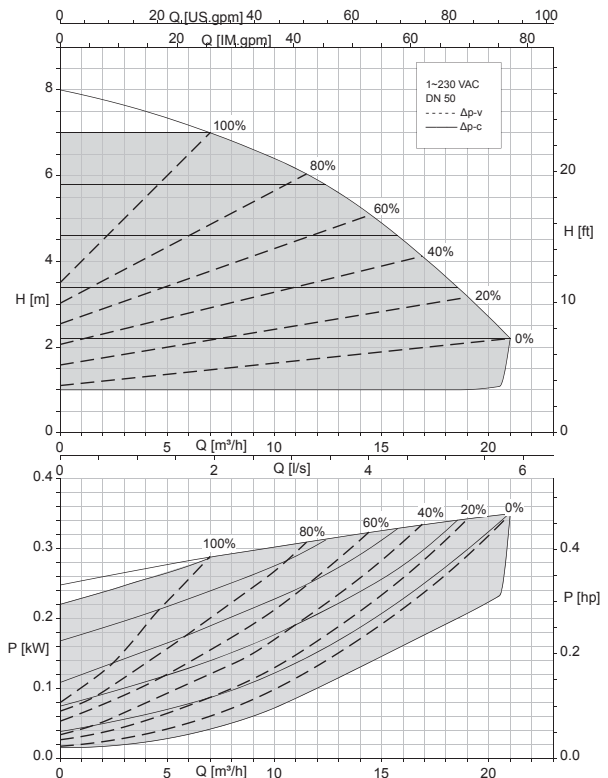


Calio 50-90 Boost Mode, Eco Mode

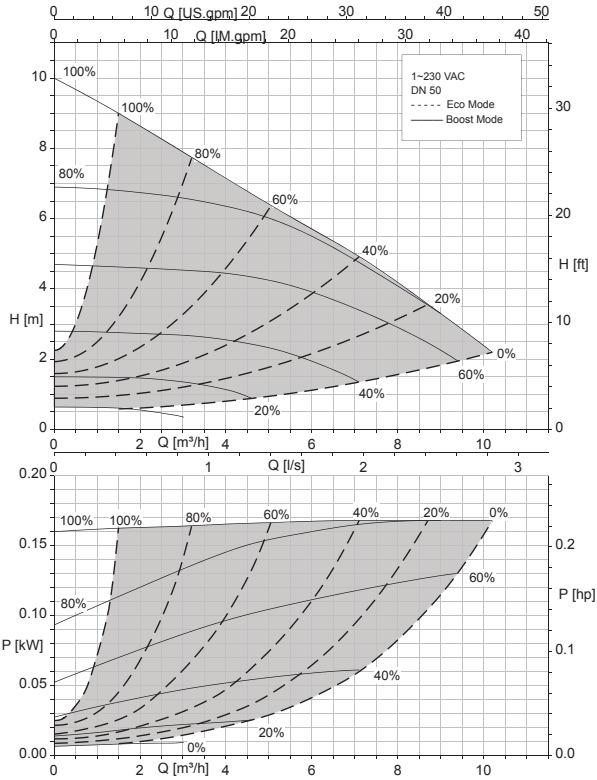


Calio 50-90 Δp_v , Δp_c

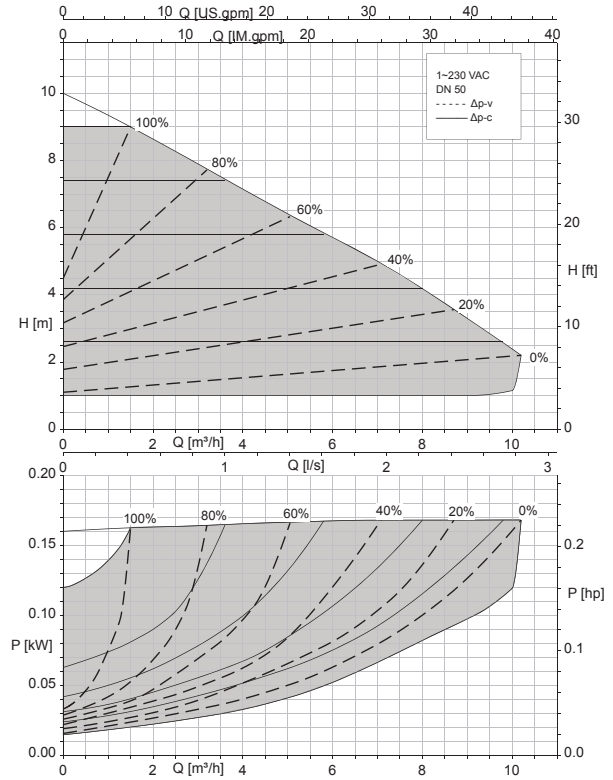


Calio 50-100 Boost Mode, Eco Mode

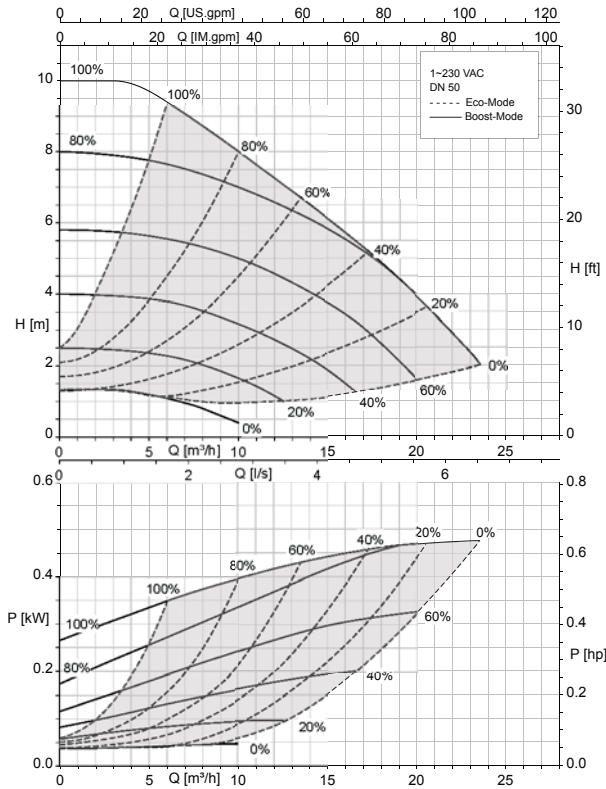


Calio 50-100 Δp_v , Δp_c

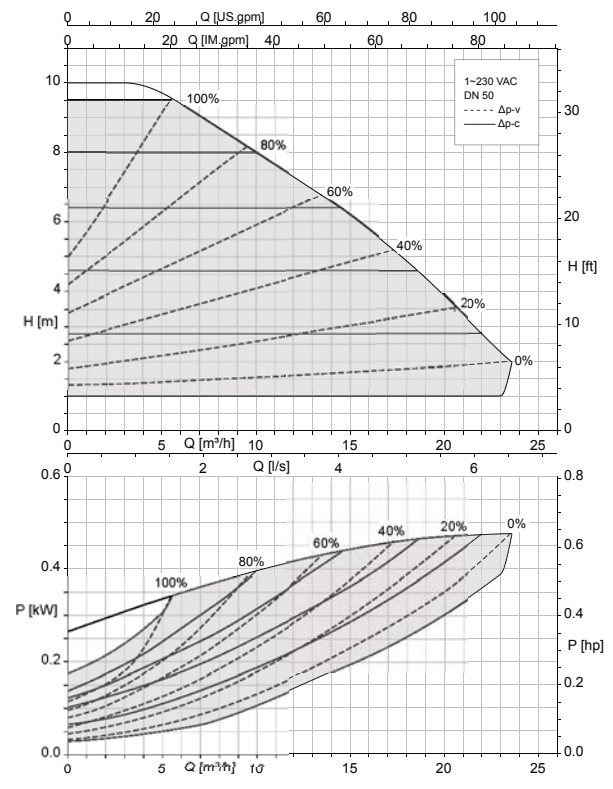


Calio 50-120 Boost Mode, Eco Mode

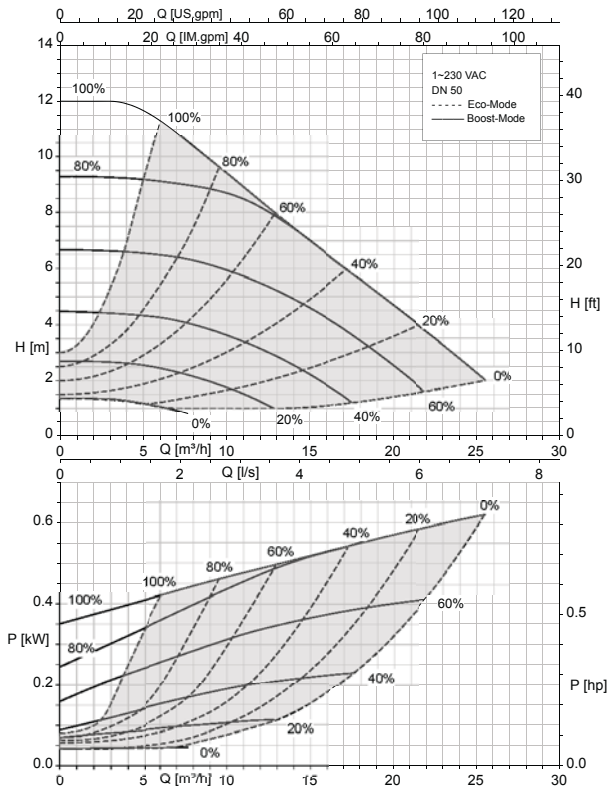


Calio 50-120 Δp -v, Δp -c

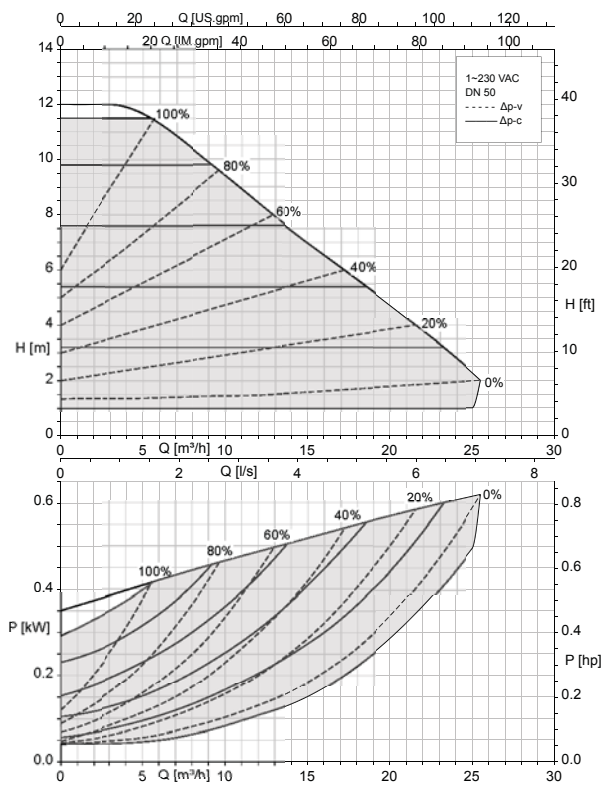


Calio 50-150 Boost Mode, Eco Mode

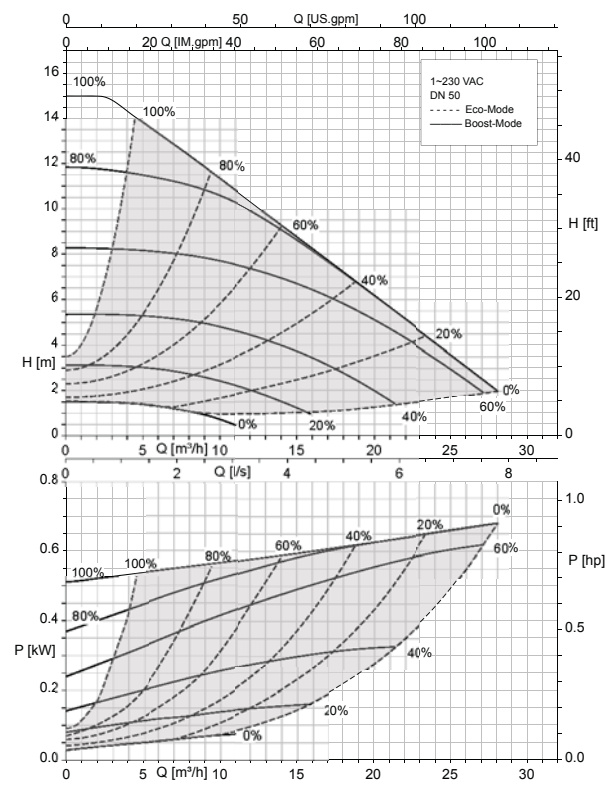


Calio 50-150 Δp -v, Δp -c

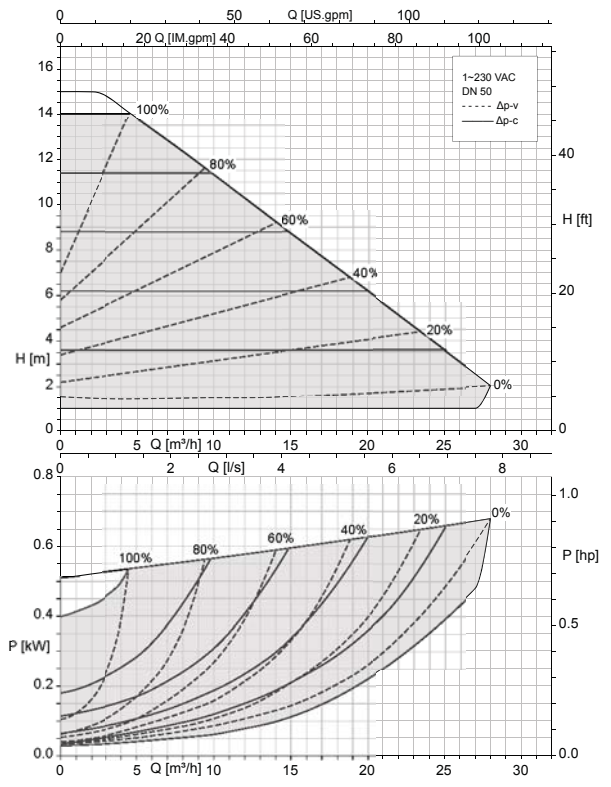


Calio 50-180 Boost Mode, Eco Mode

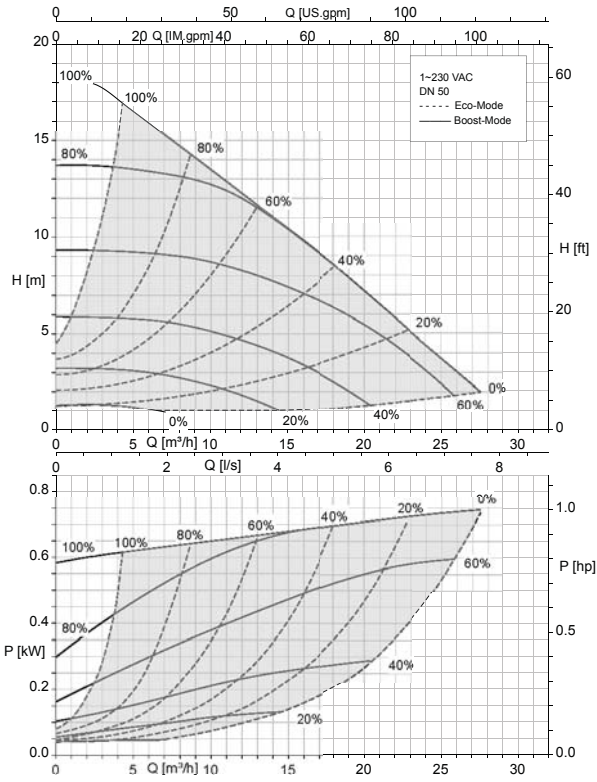


Calio 50-180 Δp_v , Δp_c

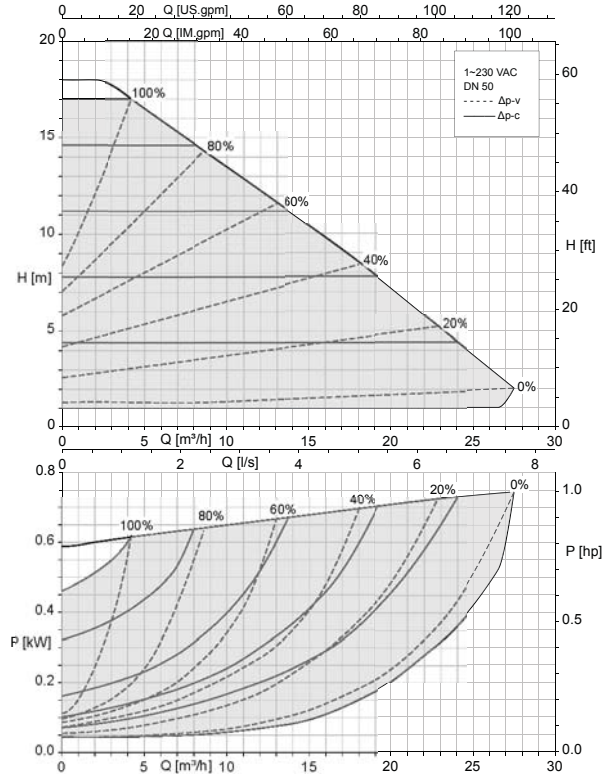


Calio 65-60 Boost Mode, Eco Mode

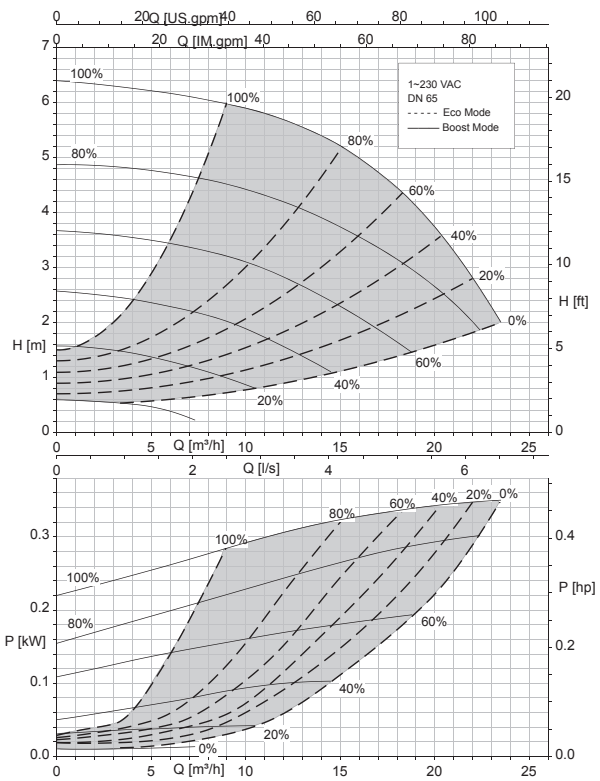


Calio 65-60 Δp_v , Δp_c

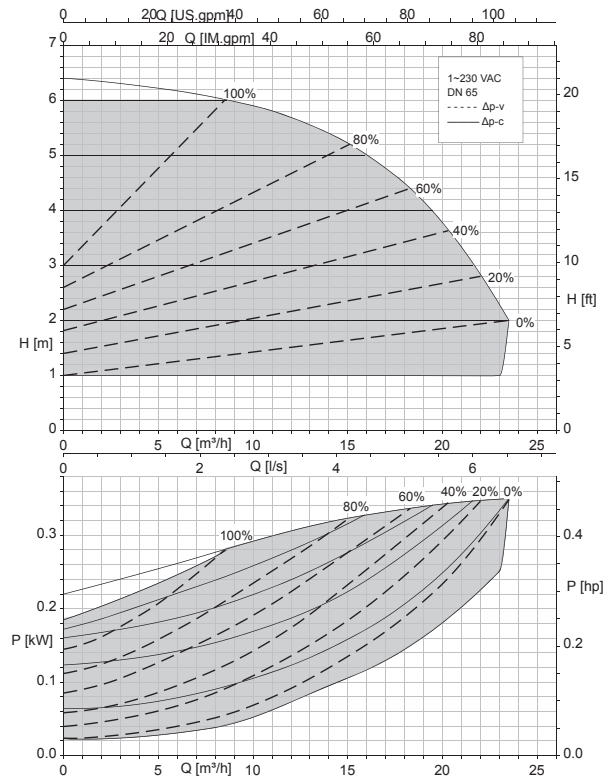


Calio 65-120 Boost Mode, Eco Mode

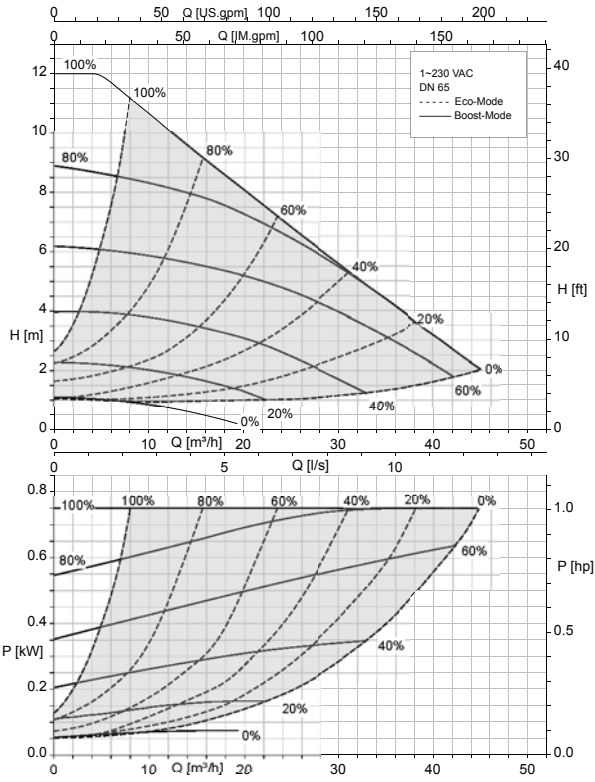


Calio 65-120 Δp -v, Δp -c

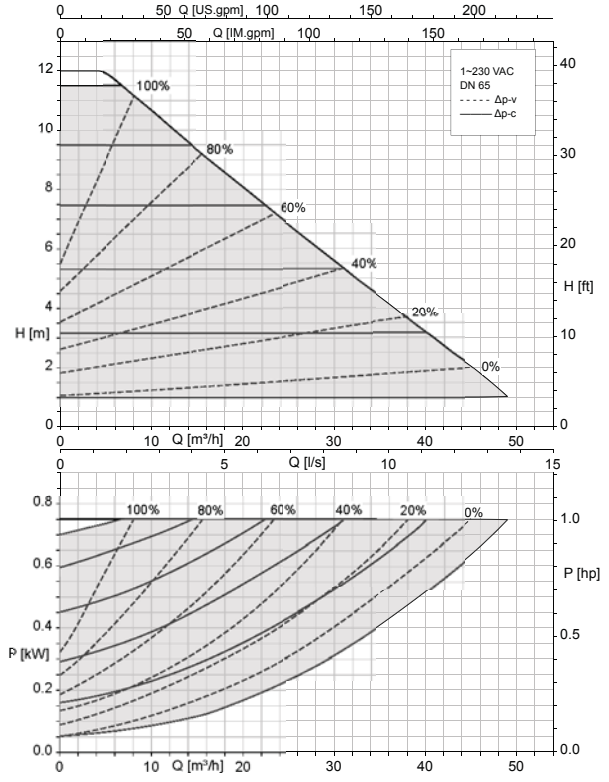


Calio 80-80 Boost Mode, Eco Mode

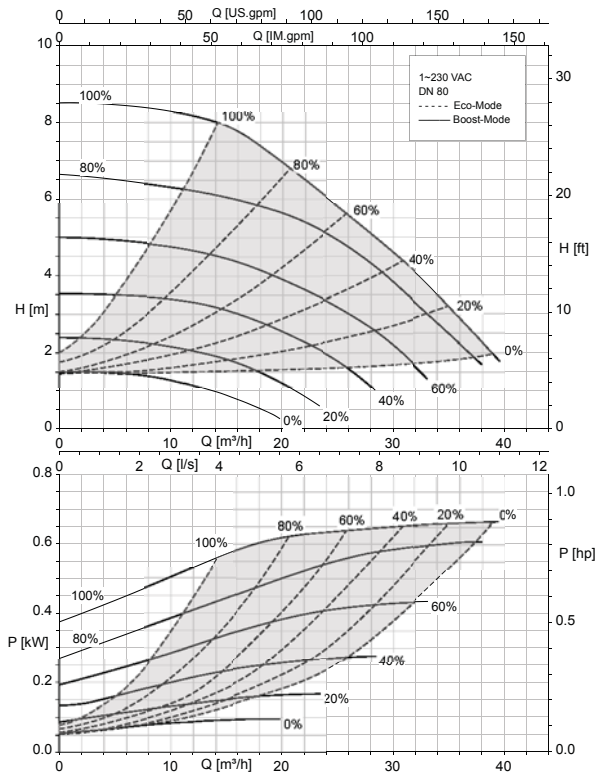


Calio 80-80 Δp -v, Δp -c

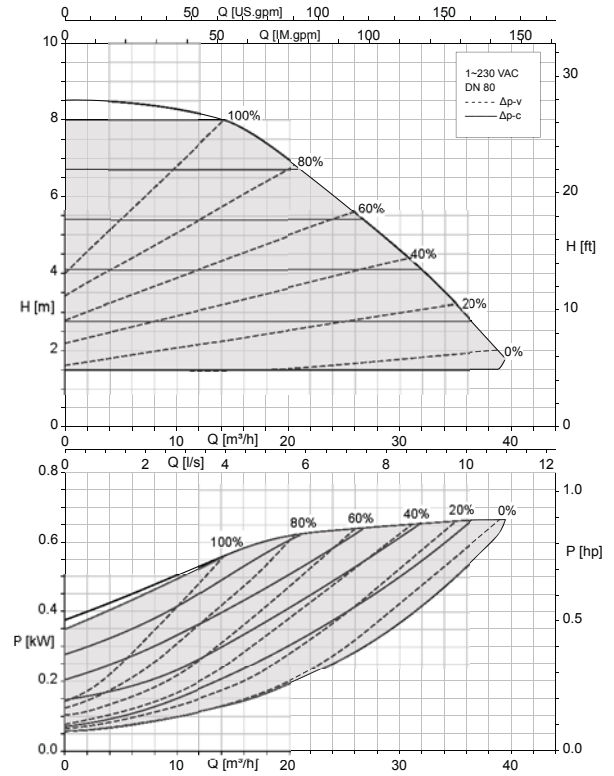

Calio 100-60 Boost Mode, Eco Mode

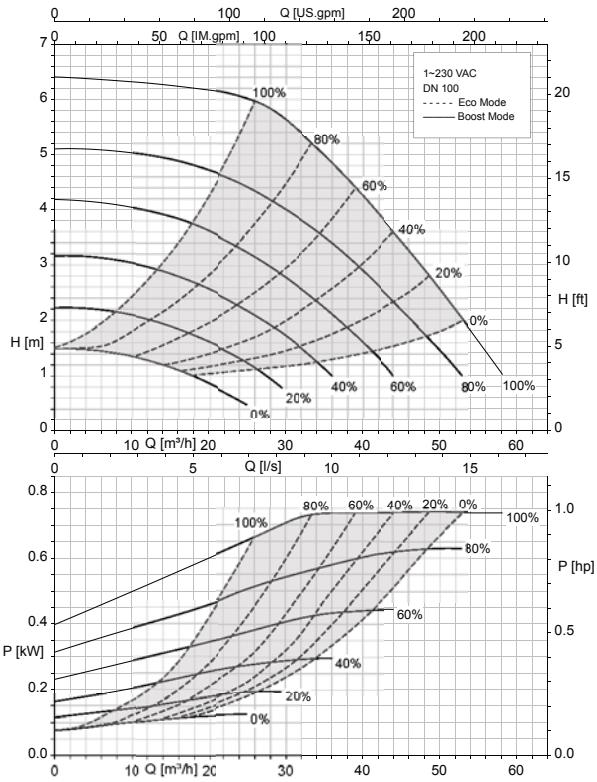

Calio 100-60 Δp_v , Δp_c

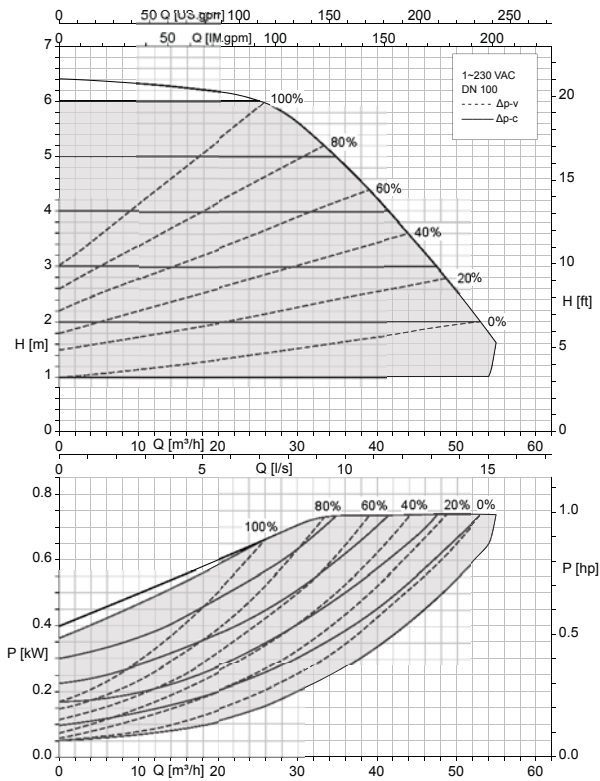

Dimensions

Pump set dimensions

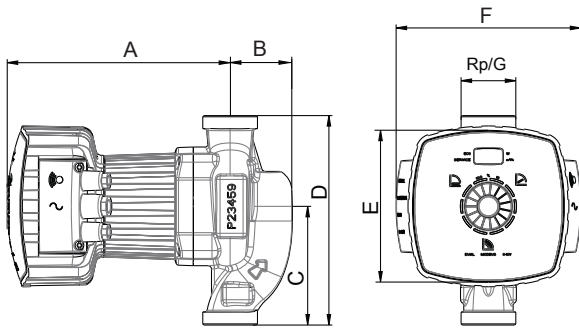


Fig. 2: Screw-ended pump set

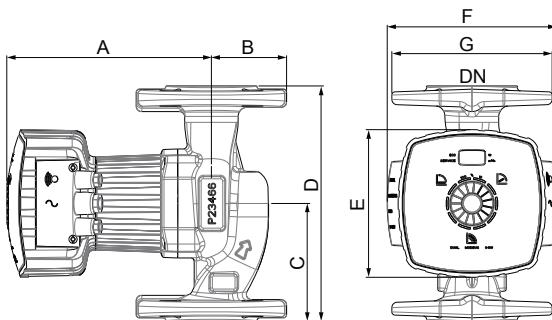


Fig. 3: Flanged pump set

Pump set dimensions [mm]

Size	Rp	G	DN	A	B	C	D	E	F
25-40	1	1 1/2	-	197	53	102	180	137	168
25-60	1	1 1/2	-	197	53	102	180	137	168
25-80	1	1 1/2	-	197	53	102	180	137	168
25-100	1	1 1/2	-	197	53	102	180	137	168
30-40	1 1/4	2	-	197	53	102	180	137	168
30-60	1 1/4	2	-	197	53	102	180	137	168
30-80	1 1/4	2	-	197	53	102	180	137	168
30-100	1 1/4	2	-	197	53	102	180	137	168
30-120	1 1/4	2	-	197	53	98	180	137	168
32-120	-	-	32	232	65	110	220	137	168
40-60	-	-	40	179	70	110	220	137	168
40-70	-	-	40	179	70	110	220	137	168
40-80	-	-	40	242	70	120	220	137	168
40-90	-	-	40	179	70	110	220	137	168
40-100	-	-	40	242	70	120	220	137	168
40-120	-	-	40	390	75	135	250	206	240
40-180	-	-	40	390	75	135	250	206	240
50-40	-	-	50	179	78	120	240	137	168
50-60	-	-	50	243	78	130	240	137	168
50-80	-	-	50	243	78	130	240	137	168
50-90	-	-	50	179	78	120	240	137	168
50-100	-	-	50	390	77	140	280	206	240
50-120	-	-	50	390	77	140	280	206	240
50-150	-	-	50	390	77	140	280	206	240
50-180	-	-	50	390	77	140	280	206	240
65-60	-	-	65	244	89	170	340	137	168
65-120	-	-	65	395	95	170	340	206	240
80-80	-	-	80	395	105	170	360	206	240
100-60	-	-	100	395	110	210	450	206	240

Flange dimensions

Flange dimensions [mm]

Size	PN 6			PN 10, PN 16			Outline drawing
	$\varnothing D$	$\varnothing k$	$n \times \varnothing d_2$	$\varnothing D$	$\varnothing k$	$n \times \varnothing d_2$	
DN 32	120	90	4 × $\varnothing 14$	140	100	4 × $\varnothing 19$	
DN 40	130	100	4 × $\varnothing 14$	150	110	4 × $\varnothing 19$	
DN 50	140	110	4 × $\varnothing 14$	165	125	4 × $\varnothing 19$	
DN 65	160	130	4 × $\varnothing 14$	185	145	4 × $\varnothing 19$	
DN 80	190	150	4 × $\varnothing 19$	200	160	8 × $\varnothing 19$	
DN 100	210	170	4 × $\varnothing 19$	220	180	8 × $\varnothing 19$	

Installation information

Calio

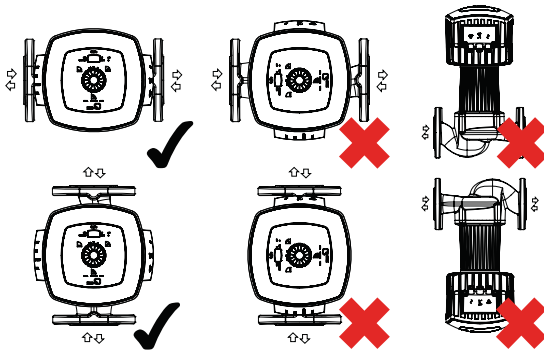



Fig. 4: Permissible installation positions

Scope of supply


Depending on the model, the following items are included in the scope of supply:

- Pump set
- Two-piece thermal insulation shell (single pump)
- 2 gaskets
- Installation/operating manual




Accessories
Electrical accessories

	Description	Mat. No.	[kg]
	BACnet MS/TP communication module Suitable for mounting in a control cabinet, for connection to 1 Calio pump	18041730	0,1


Cold water insulation

	Description	For size	Mat. No.	[kg]
	Diffusion-tight insulation for cooling applications	25-40, 25-60, 25-80, 25-100, 30-40, 30-60, 30-80, 30-100	19075685	0,2
		40-60, 40-70, 40-90	19075686	0,2
		50-40, 50-90	19075687	0,2

Pipe unions

	Description	Mat. No.	[kg]
	2 pipe unions with G 1 1/2 union nut and insert with Rp 3/4 internal thread, steel for pumps with G 1 1/2 external thread / Rp 3/4 pipe connection	19075560	0,2
	2 pipe unions with G 1 1/2 union nut and insert with Rp 1 internal thread, steel for pumps with G 1 1/2 external thread / Rp 1 pipe connection	19075561	0,2
	2 pipe unions with G 2 union nut and insert with Rp 1 1/4 internal thread, steel for pumps with G 2 external thread / Rp 1 1/4 pipe connection	19075562	0,2

Spacers (flange)

	Description	Connection	PN	Length	Mat. No.	[kg]
		Flange		[mm]		
	Spacer F16	DN 40	6/10	30	19075991	2
	Spacer F0	DN 40	6/10	70	19075566	2
	Spacer F1	DN 50	6/10	10	19075567	2
	Spacer F2	DN 50	6/10	20	19075568	2
	Spacer F3	DN 50	6/10	50	19075569	2
	Spacer F4	DN 50	6/10	60	19075570	2
	Spacer F5	DN 65	6/10	10	19075571	2
	Spacer F6	DN 65	6/10	25	19075572	2
	Spacer F7	DN 65	6/10	30	19075573	2
	Spacer F8	DN 80	6/10	10	19075574	2
	Spacer F9	DN 80	6/10	15	19075575	2
	Spacer F10	DN 80	6/10	20	19075576	2
	Spacer F11	DN 80	6/10	25	19075577	2
	Spacer F12	DN 80	6/10	30	19075578	2
	Spacer F13	DN 80	6/10	40	19075579	2
Spacer F14	DN 80	6/10	50	19075580	2	
Spacer F15	DN 80	6/10	80	19075581	2	

Your local KSB representative:



PT. Sukma Tirta Persada

Ruko Asia Tropis (Ruko Grand Boulevard)

Jl. Taman Cemara Blok AT 15 No. 48

Harapan Indah, Bekasi 17214

Tel : (+62-21) 8896 9294 , 8896 9295

Fax: (+62-21) 8865 332

info@sukmatirta.com

www.sukmatirta.com



KSB SE & Co. KGaA

Johann-Klein-Straße 9 • 67227 Frankenthal (Germany)

Tel. +49 6233 86-0

www.ksb.com