



Your contact:



PT. Sukma Tirta Persada

Ruko Asia Tropis (Ruko Grand Boulevard) Jl. Taman Cemara Blok AT 15 No. 48 Harapan Indah, Bekasi 17214 Tel: (+62-21) 8896 9294, 8896 9295

Fax: (+62-21) 8865 332 info@sukmatirta.com

www.sukmatirta.com

Sewatec/Sewabloc - Waste Water Pump

1 High operating reliability

Double-acting mechanical seal in tandem arrangement with oil reservoir seals off the pumped fluids

2 Cost reduction

Standardised components are interchangeable within the entire Amarex KRT submersible motor pump series, so spare parts inventories can be optimised

3 Low-maintenance design

Grease-packed rolling element bearings sealed for life

4 Variable hydraulic system


Impellers and casing optimised for handling waste water

Energy savings

When combined with the high-efficiency KSB SuPremE® motor, the pump sets make for significantly reduced operating costs

Variable installation type

see below

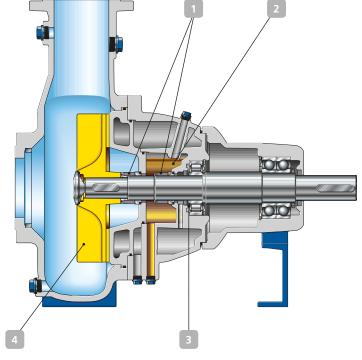

Impellers



Type F







Type D

Technical data

| Sizes | up to DN 700 |
|--------------------|-----------------|
| Capacity | up to 2,775 l/s |
| Head | up to 95 m |
| Discharge pressure | up to 10 bar |
| Temperature | up to +70 °C |

Installation type options







